

GENERAL INSTRUCTIONS
OVAL POOL

for regular installation

**DAYTONA
TRIBECA**

designed by 

95-0810

ABOVE GROUND POOL SAFETY

PLEASE READ BEFORE INSTALLATION

FAILURE TO HEED THESE WARNINGS CAN RESULT IN PERMANENT INJURY, PARALYSIS FROM A BROKEN NECK, ELECTROCUTION OR DROWNING. THIS POOL IS NOT DESIGNED FOR DIVING OR JUMPING! DANGEROUS INJURY CAN RESULT, SHALLOW WATER!

Your pool contains a large quantity of water, and is deep enough to present inherent dangers to life and health unless the following safety rules are strictly observed. First-time users run the highest risk of injury. Make sure everyone understands. To insure your pool is used safely you must observe the following safety precautions:

1. NO JUMPING OR DIVING

The top rail of your pool is not a walkway and must not be used for jumping or diving. Do not permit jumping or diving into the pool from a deck or the top rail of the pool. Diving or jumping into the pool can result in serious injury.

2. NEVER USE THE POOL ALONE

Never permit the pool to be used unless it is attended by at least one person other than the bather. Someone should always be available to lend assistance in an emergency.

3. NEVER LEAVE CHILDREN UNATTENDED

Never leave a child alone and unsupervised in or near the pool, not even for a second. There is no substitute for constant adult supervision.

4. NO ROUGH PLAY

Do not permit "rough-playing" in and around your pool. Surfaces can become slippery and hazardous when wet.

5. LIGHT THE POOL AT NIGHT

If the pool is used after dusk, adequate lighting must be provided. Illumination in the pool area must be sufficient to clearly judge pool depth and all features in and around the pool. For lighting recommendations, consult your local licensed electrical contractor

6. RESTRICT ACCESS TO THE POOL

Do not leave chairs or other furniture beside the pool that could be used by a child to climb up into the pool. Ladders must be removed whenever the pool is unattended. A fence with a lockable gate around the pool or yard is strongly recommended and may be required by law in some jurisdictions.

7. NO ALCOHOL OR DRUGS

Never drink alcoholic beverages or use any intoxicants which could hinder your judgment and reflexes.

8. KEEP YOUR POOL CLEAN AND SANITARY

Your filter system will remove suspended particles from the water and the surface skimmer will remove insects, leaves and other debris from the water surface. Use the correct pool chemicals as directed to destroy harmful bacteria and prevent formation of algae. Remember, unsanitary water is a serious health hazard.

9. KEEP OFF TOP LEDGES

Do not walk on top ledges. They can be slippery and they are not a walkway.

10. POOL COVER SAFETY

The cover must have a tamperproof locking retainer cable that positions the cover around the pool wall and keeps it securely in place. Never allow anyone, especially small children on the cover. Asphyxiation or drowning could result. When purchasing any pool cover, please consult a swimming pool professional.

11. ELECTRICAL HAZARD

Never touch or attempt to service electrical equipment, including the filter when your body and/ or the ground is wet. Electrocution or permanent injury due to high voltage (120V AC) could result. The pool should be bonded in accordance with Section 680-26 of the National Electrical Code. For further assistance contact your dealer or a local licensed electrician. Do not use pool during electrical or rain storms.

12. SAFETY ROPE & POLE

Keep a safety rope 1/4" by 50" with a flotation buoy with an outside diameter of 15". Have accessible in a prominent area by your pool. Keep a pole not less than 16 feet (4.88m) long with a blunt or hook end available at pool side in case of emergencies.

13. POOL CHEMICALS

Do not place chlorine, chlorine tablets or sticks directly into skimmer, or winterize your pool with liquid chlorine. Damage to the skimmer, pool liner and filter will result. Failure to obey this instruction will void all component warranties. Always follow Chemical Manufacturer's instructions when storing, handling and dispensing pool chemicals.

14. CHECK FOR DAMAGE

Periodically check your pool and ladder components for damage and wear. Be sure all screws are in place. Replace all damaged or worn components and tighten all screws before you use the pool, deck or ladders. At first sign remove rust and touch up immediately.

15. POOL PARTS

Never modify the pool or accessories, or remove or drill holes in the pool, deck or ladder components unless instructed. Your pool wall is made of thin metal, there is an inherent cut hazard with metal so use gloves during installation. Always use Original Equipment Manufactured parts

FOLLOW ALL SAFETY INSTRUCTIONS

Read and follow all safety instructions packaged with pool, ladder, deck or any other accessory. Additional pool safety publications can be obtained by contacting: The Association of Pool & Spa Professionals (www.apsp.org)

Important notice read before installation!

The safety stickers must be installed as per following instructions. Failure to properly install warning labels will void warranty. Failure to mount these safety labels may subject you to substantial liability in case of injury. These warning are not to be removed under any circumstances! If they become discolored or fall off please request replacements which will be sent at no charge.



IMPORTANT INFORMATION ABOUT YOUR LINER

We do not make or supply liners for our pools.

Please contact your liner's manufacturer with questions or if instructions are not included with the liner.

Liner must be installed per the liner manufacturer's instructions.

Incorrect liner installation may void the warranty.

TABLE OF CONTENTS

GENERAL INSTRUCTIONS – OVAL POOLS

 / **01**
SECTION PARTS
LISTING

 / **02**
SECTION GROUND
PREPARATION

 / **03**
SECTION ASSEMBLING
THE POOL BASE


 / **04**
SECTION ASSEMBLING
THE POOL WALL

 / **05**
SECTION ASSEMBLING
THE POOL FRAME

 / **06**
SECTION FOOTPRINTS

 **01** PARTS LISTING
SECTION

Exploded view

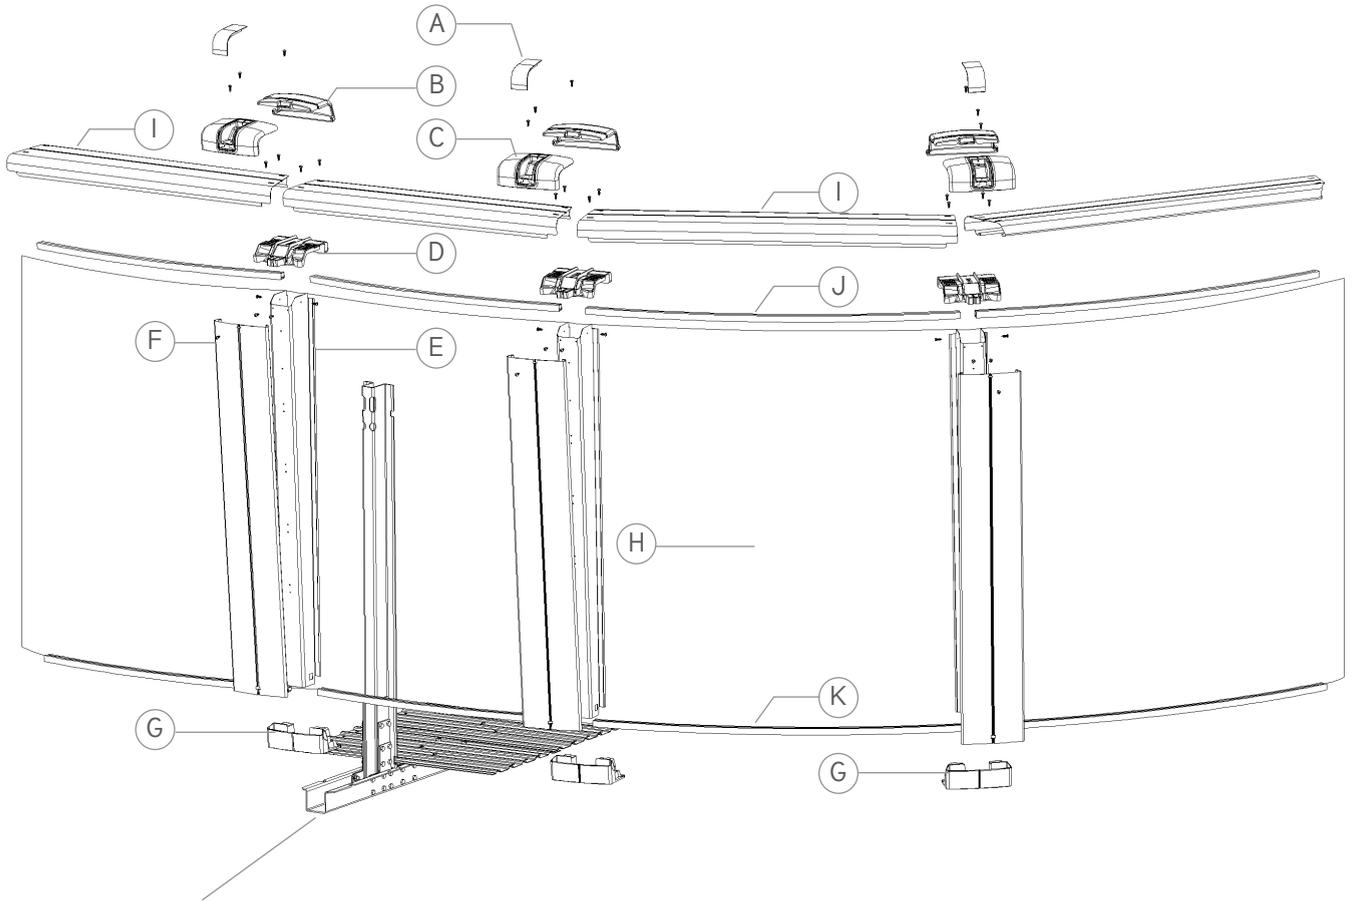

Refer to page 9
Buttress Assembly

Parts listing

| Index | Description | Part # | 12x17 | 12x20 | 12x24 | 15x26 | 15x30 | 18x33 | 18x40 |
|----------|------------------------------------|-----------|-------|-------|-------|-------|-------|-------|-------|
| A | Ledge cover top (Daytona) | 38626 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| A | Ledge cover top (Tribeca) | 22122 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| B | Ledge cover inner (Daytona) | 38625 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| B | Ledge cover inner (Tribeca) | 22121 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| C | Ledge cover outer (Daytona) | 38624 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| C | Ledge cover outer (Tribeca) | 22120 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| D | Top plate | 38594 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| E | Inner upright | | | | | | | | |
| | Inner upright_ 52" Tall (Daytona) | 38590 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| | Inner upright_ 54" Tall (Daytona) | 38591 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| | Inner upright_ 52" Tall (Tribeca) | 22131 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| F | Outer upright | | | | | | | | |
| | Outer upright_ 52" Tall (Daytona) | 38588 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| | Outer upright_ 54" Tall (Daytona) | 38589 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| | Outer upright_ 52" Tall (Tribeca) | 22129 | 14 | 16 | 18 | 18 | 20 | 22 | 26 |
| G | Foot Cover (Boot) | | | | | | | | |
| | Boot _ round section (Daytona) | 38627 | 10 | 12 | 12 | 12 | 12 | 14 | 14 |
| | Boot _ straight section (Daytona) | 22902 | 4 | 4 | 6 | 6 | 8 | 8 | 8 |
| | Boot _ round section (Tribeca) | 22123 | 10 | 12 | 12 | 12 | 12 | 14 | 14 |
| | Boot _ straight section (Tribeca) | 22124 | 4 | 4 | 6 | 6 | 8 | 8 | 8 |
| H | Steel wall | W***52/54 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Parts listing

| Index | Description | Part # | 12x17 | 12x20 | 12x24 | 15x26 | 15x30 | 18x33 | 18x40 |
|----------|---|--------|-------|-------|-------|-------|-------|-------|-------|
| I | Top Ledge (Daytona) | | | | | | | | |
| | Top ledge _ straight section 41" | 40139 | 2 | 6 | 8 | 8 | 10 | 12 | 14 |
| | Top ledge _ round section 15' 49-1/2" | 22086 | - | - | - | 10 | 10 | - | - |
| | Top ledge _ round section 18' 51-1/8" | 22088 | - | - | - | - | - | 12 | 12 |
| | Top Ledge (Tribeca) | | | | | | | | |
| | Top ledge _ straight section 41" | 40356 | 2 | 6 | 8 | 8 | 10 | 12 | 14 |
| | Top ledge _ round section 15' 49-1/2" | 40353 | - | - | - | 10 | 10 | - | - |
| | Top ledge _ round section 18' 51-1/8" | 40354 | - | - | - | - | - | 12 | 12 |
| J | Stabilizer | | | | | | | | |
| | Stabilizer _ straight section 33" | 38512 | 2 | 2 | 4 | 4 | 6 | 6 | 10 |
| | Stabilizer _ round section 7'6" R 53-1/4" | 38502 | - | - | - | 10 | 10 | - | - |
| | Stabilizer _ round section 9'0" R 54-1/8" | 38503 | - | - | - | - | - | 12 | 12 |
| | Stabilizer _ transition section | 38511 | - | 4 | 4 | 4 | 4 | 4 | 4 |
| | Straight side stabilizer at the straight side upright | 38513 | 4 | 4 | 6 | 6 | 8 | 8 | 12 |



01

PARTS LISTING


SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

Parts listing

| Index | Description | Part # | 12x17 | 12x20 | 12x24 | 15x26 | 15x30 | 18x33 | 18x40 |
|----------|--|---------------------|-------|-------|-------|-------|-------|-------|-------|
| K | Bottom Rail | | | | | | | | |
| | Bottom rail _ straight section 9'0" R 37-1/2" | 16713 | 2 | 2 | 4 | 4 | 6 | 6 | 10 |
| | Bottom rail _ round section 7'6" R 49" | 38502 | - | - | - | 10 | 10 | - | - |
| | Bottom rail _ round section 9'0" R 50" | 38503 | - | - | - | - | - | 12 | 12 |
| | Bottom rail _ transition section 9'0" R 39" | 16714 | - | 4 | 4 | 4 | 4 | 4 | 4 |
| - | Plastic Coping | 10296 | 12 | 14 | 16 | 18 | 20 | 22 | 26 |
| - | Hardware | | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Gibraltar Pack | NLR-3900520399-0085 | 1 | 1 | 1 | 1 | 4 | 4 | 4 |



Overview of the Buttress assembly

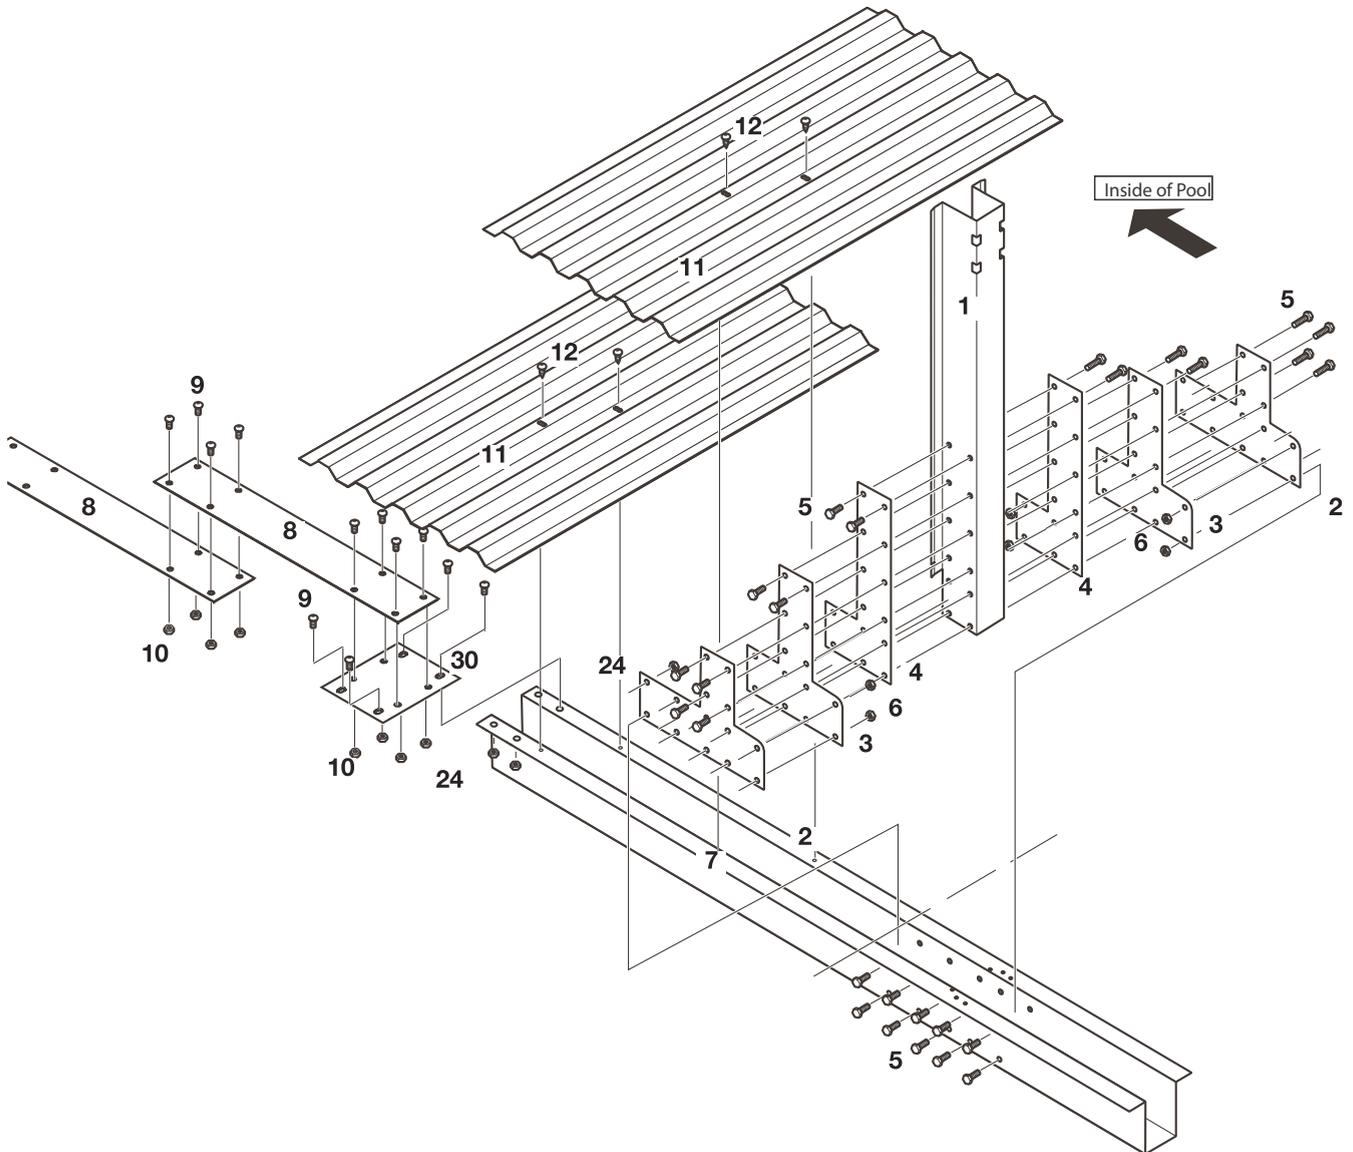

Parts listing _ Buttress assembly

| Key | Description | Part # | 12x17 | 12x20 | 12x24 | 15x26 | 15x30 | 18x33 | 18x40 |
|-----|---|---------|-------|-------|-------|-------|-------|-------|-------|
| 7 | Base U-Channel | 1440335 | 4 | 4 | 6 | 6 | 8 | 8 | 12 |
| 1 | Upright Channel | 1440383 | 4 | 4 | 6 | 6 | 8 | 8 | 12 |
| 4 | Inside 'L' Bracket | 1320147 | 8 | 8 | 12 | 12 | 16 | 16 | 24 |
| 3 | Middle 'T' Bracket | 1320138 | 8 | 8 | 12 | 12 | 16 | 16 | 24 |
| 2 | Outside 'T' Bracket | 1320139 | 8 | 8 | 12 | 12 | 16 | 16 | 24 |
| 11 | Hold Down Plate (Pressure plate) | 1320166 | 8 | 8 | 12 | 12 | 16 | 16 | 24 |
| 30 | Strap Bracket | 1320164 | 4 | 4 | 6 | 6 | 8 | 8 | 12 |
| 8 | Strap | | | | | | | | |
| | Strap 12' | 1510139 | 4 | 4 | 6 | - | - | - | - |
| | Strap 15' | 1510140 | 9 | 9 | 9 | 9 | 12 | - | - |
| | Strap 18' | 1510141 | - | - | - | - | - | 12 | 18 |
| | Strap Hardware | 22098 | - | - | - | - | - | - | - |
| - | Hardware bag, 1per set of buttresses; (Refer to page 8) | 1184293 | 2 | 2 | 3 | 3 | 4 | 4 | 6 |
| 9 | 1/4" -20NCx3/4" hex bolt | 1184275 | 40 | 40 | 60 | 72 | 96 | 96 | 144 |
| 10 | 1/4" -20NCx3/4" serrated flange hex nut | 1184052 | 24 | 24 | 36 | 48 | 64 | 64 | 96 |
| 5 | 3/8"-16NCx1" hex bolt | 1184237 | 144 | 144 | 216 | 216 | 288 | 288 | 432 |
| 6 | 3/8"-16NC serrated flange hex nut | 1184238 | 144 | 144 | 216 | 216 | 288 | 288 | 432 |
| 12 | No. 12x5/8" self-tapping screw | 1184105 | 16 | 16 | 24 | 24 | 32 | 32 | 48 |
| 24 | Nut/Hex/1/4"-20/18-8SS | N14x20 | 16 | 16 | 24 | 24 | 32 | 32 | 48 |

Hardware for gibraltar pools
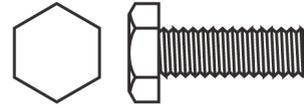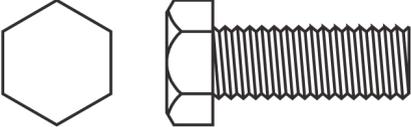
| DESCRIPTION | ACTUAL SIZE | TOOL REQUIRED FOR INSTALLATION |
|---|---|--|
| SELF TAPPING SCREW #12 x 5/8 INCH LONG |  | PHILLIPS NUMBER 3 SCREWDRIVER OR RED HANDLE #2 ROBERTSON SCREWDRIVER |
| SERRATED FLANGE HEXAGON NUT 1/4-20 |  | 7/16 INCH WRENCH OR SOCKET |
| HEXAGON HEAD BOLT 1/4-20 x 3/4 INCH LONG |  | 7/16 INCH WRENCH OR SOCKET |
| SERRATED FLANGE HEXAGON NUT 3/8-16 |  | 9/16 INCH WRENCH OR SOCKET |
| HEXAGON HEAD BOLT 3/8-16 x 1 INCH LONG |  | 9/16 INCH WRENCH OR SOCKET |

**SPECIAL
NOTICE WILL
BE DELIVERED
BY YOUR
LOCAL DEALER
FOR EVERY
INSTALLATION
OUT OF THE
MANUFACTURER
STANDARDS.**

Plan your installation first

Check local laws on construction and electrical installation. Also make sure that you meet security standards related to fences and pool cover. Select an appropriate site for your swimming pool by considering the following points:

- + Distance from the fence
- + Overhead electrical wires
- + Predominant winds
- + Accessory location (filter, decking, ...)
- + Appropriate electrical outlets
- + Surrounding trees (falling leaves and roots)
- + Underground cables and gas conduits
- + Do not install your pool on concrete, asphalt, wood, grass turf, top of grass, gravel or chemically treated soil. Avoid also weed and nut grass area.
- + Avoid areas with poor drainage.
- + Do not install on windy days
- + Sun reflection in your yard
- + Install with 2 or 3 helpers

Be careful

Ground surface and levelness: it is very important that the ground surface be firm and solid. Pool area must be free of grass, rocks roots or other sharp edges objects. Any parcel of grass left under the pool will rot and release unpleasant odors. Avoid installing your pool on surface which has been treated with oil weed-killer or chemical products. This could affect the vinyl liner among other things.

The entire pool surface must be completely levelled when preparing your site. DO NOT FILL LOWER GROUND AREA because any added ground won't give the needed strength to support pools weight. For a surface level delta greater than 3" (10 cm), contact your pool supplier for specific instructions relative to your situation.

Before you start your installation: make sure you have all the parts for complete assembling (see your parts lists). If irregularities such as missing part(s) or defect(s) ever occur, go to your dealer to get new pieces.





A. DETERMINE THE LOCATION OF YOUR POOL

1. The Terrain

Pay special attention to choosing the right location for your pool:

- Choose a large area, as flat and level as possible and well drained. **(Image 1)**
- Choose a spot on dry, firm earth (stabilizer or other)—do not install the pool on asphalt, tar or oil based surfaces, gravel, peat moss, wood or chemically treated soil.
- Check with your pool dealer to see if Nut Grass grows in your area. This type of grass may grow up through your pool liner. Your dealer will be able to advise how best to treat the site.
- Sloped areas will need to be made level by digging away high spots, not by filling low spots—be prepared to hire earth-moving equipment if necessary. **(Images 2)**
- Ensure the earth is well compacted and a wall is placed to prevent the earth from seeping out.
- If you need to install partly in the ground, you must contact your dealer to see if this is an option for you and that you meet law requirements in your jurisdiction. **(Image 3)**

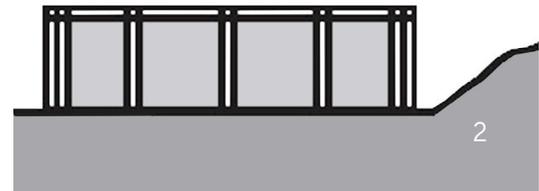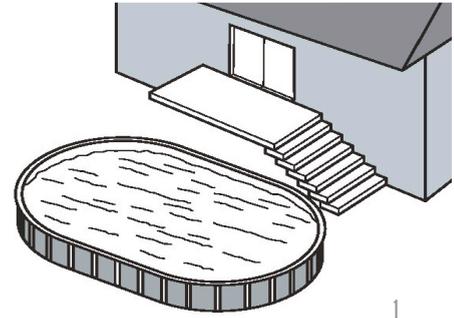

IMPORTANT NOTE:

Ground preparation is one of the most important steps in the installation process. A proper foundation will ensure the rest of the pool assembly goes smoothly and that no problems will occur when the pool is filled with water.

2. Things to Avoid

Do not locate your pool near or on any of the following (Images 4 to 6) :

- Overhanging tree branches.
- Overhead wires and clotheslines.
- Buried pipes and wires. Contact your gas, electric and telephone utilities to find buried pipes and wires before you dig.
- Areas with poor drainage.
- Grass, stones and roots. Grass will rot underneath the pool liner, and stones and roots will damage the pool liner.
- Areas recently treated with oil-based weed killers, chemicals or fertilizers.




3. Plan Ahead

- Will you be adding an adjacent deck later? Be sure to leave room.
- Will you be using pool accessories or other appliances that need electricity or gas? Locate your pool near these services or plan to have them installed later by a licensed contractor.




IMPORTANT NOTE:

When locating the centre of the pool, be sure to take into consideration any structures (deck, patio, house) or relevant items (change rooms, gazebo, etc.) that the pool may need to line up with and ensure that the pool is in the most visual pleasing location for your property.

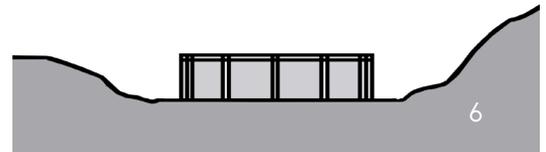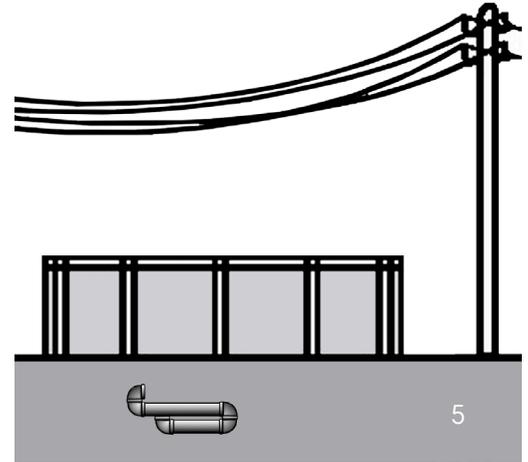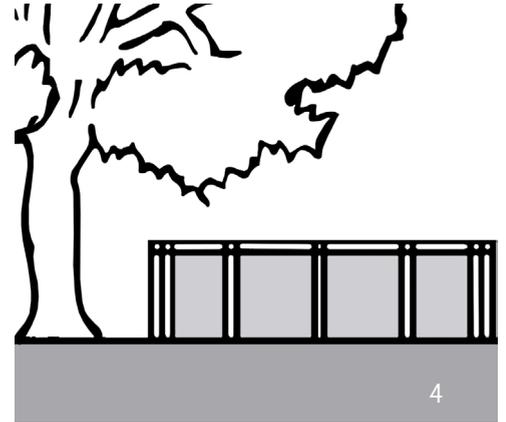

4. Tools Needed



Compactor



Hammer



Water hose



Level




File



Vacuum cleaner



Pliers



Rake



Lawn roller



Metal snips



Screwdriver



Wheelbarrow



Shovel



Spraypaint



Mallet



List of required materials

- Straight wood plank
- Material that provides a permanent base (ex. Crushed stone)
- Fine sand (void of debris)
- Cement blocks (5cm x 20cm x 40cm / 2"x 8"x16") (optional)
- 2x Plywood (60cm x 120cm /2ft x 4ft)
- Wood board (30cm x 20cm /1ft x 1ft)
- Vinyl covered hooks (to hold wall steady)
- String and stakes & wooden pegs
- Prefabricated cove sections (optional)
- Pool carpeting (optional)
- Rope
- Polyethylene Plastic Sheeting
- Optical Level can be useful for precise measurements



Important Note:

Wall edges, skimmer and water return holes may be sharp, it is important to wear gloves when installing.

B. PREPARE THE FOUNDATION OF YOUR POOL

1. Mark out the Area

a) The next following steps will show you how to mark out the area you need for the oval pool. This marked area will be larger than the pool size itself, but this space is needed. Find a site where the ground is stable, level and well drained. Once you have selected your site, determine where the middle of your pool will be.

See Diagrams:





Please see in the next page for an **EXAMPLE p.18** on how to correctly mark your pool area. Please verify your pool's **FOOTPRINT** for correct measurements (end of this document).

b) Drive a peg into the ground at the centre point. **(Image 8)**

c) Now you must make the round ends that will be the oval part. In order to do so, you will have to determine the center of the radius on each side and drive a peg into the ground. **(Image 9)**

d) Using a length of string tied between the peg and a can of spray paint mark the circles on the ground. **(Image 10)**


e) Once the center has been established, and the measurement of the pool itself has been determined, you must now determine the outer limits of the perimeter of your pool. Add 12" (30 cm) outside this measurement to determine pool perimeter. **(Image 11)**

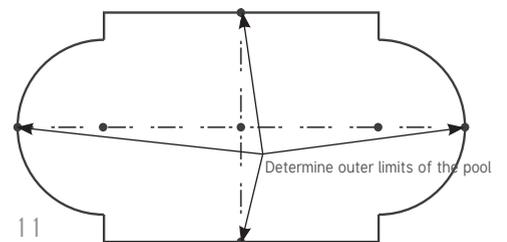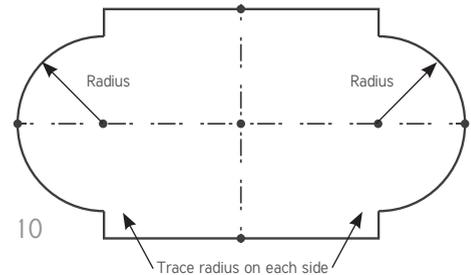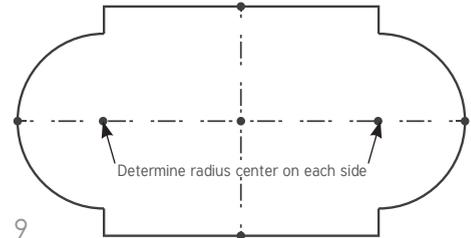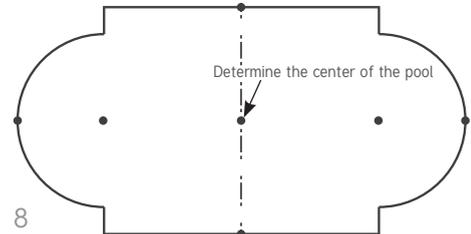


02 GROUND PREPARATION

SECTION

f) Mark areas along both straight sides of your oval. Use pegs and string as a guide for the can of spray paint to mark straight lines. **(Image 12)**

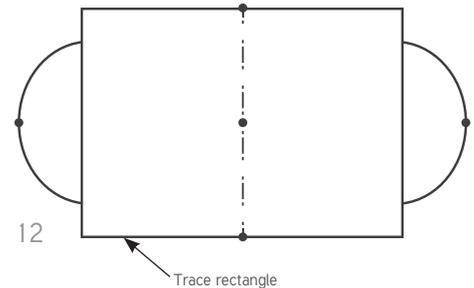


g) You now have the space marked out that is needed for your oval pool. **(Image 13)**

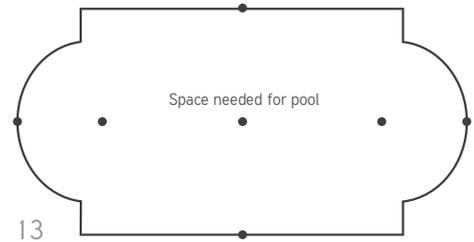

2. Remove the sod

a) Remove the sod from the area you have just outlined. **(Image 14)**


b) Remove all debris (rocks, roots, etc) using a rake. Then compact the ground to achieve a firm base. You can use a sod removal machine.

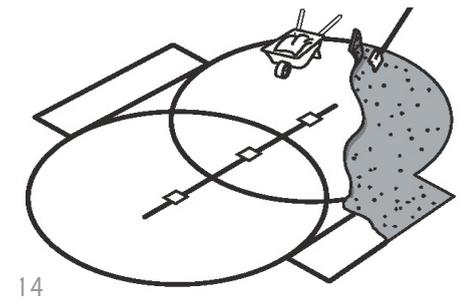

IMPORTANT NOTE:

Your pool must be perfectly level. Take the time you need to be sure your foundation is perfectly level.

Example on how to mark out pool area for an 18 x 33
 Please be sure to use your pool's footprint for your pool size at the end of this document.

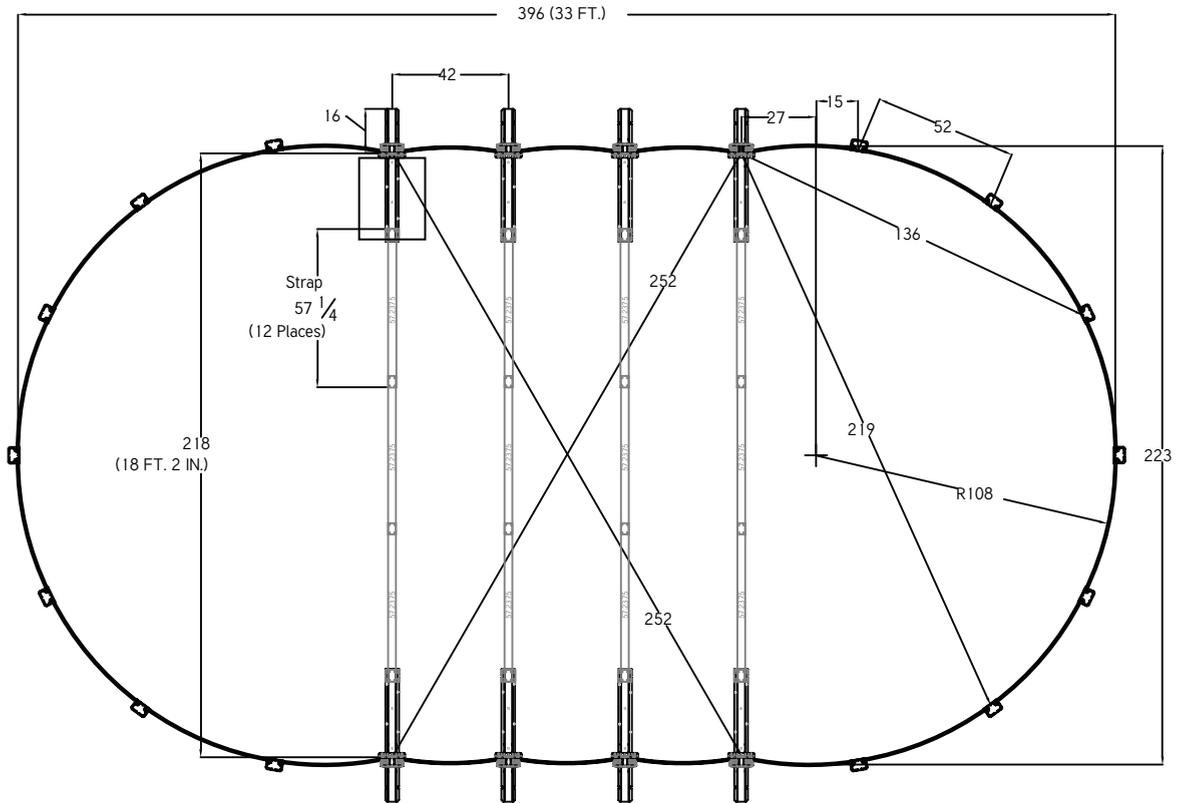

EXAMPLE

3. Make the area flat and level


a) Remove all the high spots with a shovel, hoe or rake. To make sure your pool is stable, compact the ground well before adding the sand. Be prepared to hire earth moving equipment if you need to level a large area. Remember, your pool must be level across the diameter of the pool. **(Image 15)**

b) Small dips and hollows may be filled in, but the soil must be hard-packed with a tamping tool or a soil compactor.


c) Take material such as rock dust or fine mortar that can conform a solid, permanent base and deposit this material around the rim of the basin. **(Image 16)**

d) The material used should be spread around the perimeter of the pool to a width of 24" (60cm) and a thickness of 2" (5cm). **(Image 17)**


e) Recheck the outer perimeter of the oval shape, where the pool wall will be placed. Compact the ground and make sure there are no high or low spots. The bottom edge of the pool wall must rest flat on the ground and have no gaps under it.

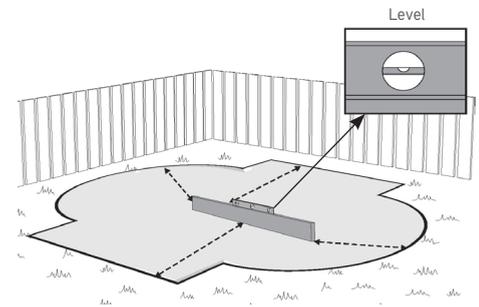

15

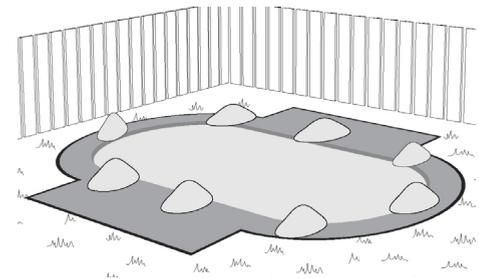

16

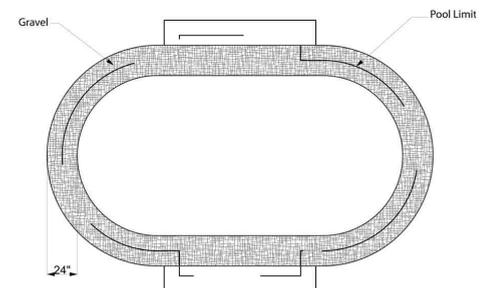

17



IMPORTANT NOTE:

Your pool must be perfectly level. Take the time you need to be sure your foundation is perfectly level.


C. GROUND PREPARATION FOR THE BUTTRESS

4. Measuring for the buttress trenches

a) In order to measure where trenches need to be dug for the placement of the buttress, you must first draw a perpendicular line in order to create a perfect 90 degree angle. From the pool center, trace a straight line to the oval perimeter. **(Image 18)**


b) In order to ensure that your line is perpendicular, measure from each radius center to the top of your line. The measurement should be exactly the same on each side. If not, adjust until both are the same and you will now have a perfect perpendicular line, therefore creating a perfect 90 degree angle. **(Images 19 & 20)**

c) Repeat the first two steps to create a perpendicular line in order to create a perfect 90 degree angle for the other side of the oval pool.

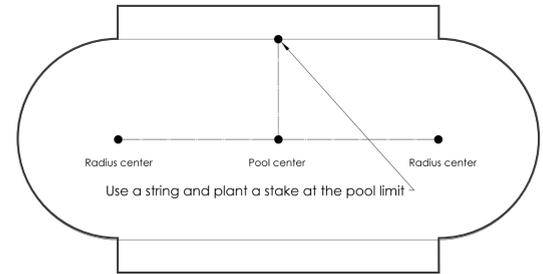


18

Trace a line from the stake to each radius center

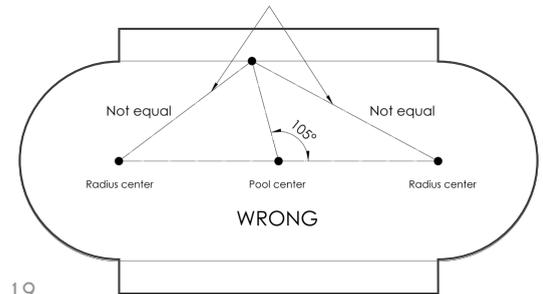

19

Trace a line from the stake to each radius center

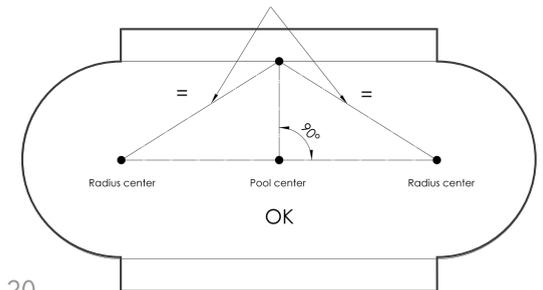

20



IMPORTANT NOTE:

It is very important that when you follow the instructions on the next page, that you apply the next steps to only one side of the pool at a time. It is imperative that you follow the next steps in order.

5. Digging the buttress trenches

Odd number of trenches :




a) If your oval pool contains an even number of buttresses, please proceed with next step b. If your oval pool contains an odd number, position the buttress temporarily on the straight center line from the middle. **(Image 21)**

Continue to step c. Note: Odd number means the total of sections on one side, for example a 12 x 24 pool has Odd number.

Even number of buttresses :

b) If your oval pool contains an even number of buttresses, measure from the center line out the required measurement as per your footprint, see the last pages in this section 1. Position the buttress temporarily off the straight center line from the middle. **(Image 22)** Continue to step c. Note: Even number means the total of sections on one side, for example a 15 x 30 pool has Even number.

c) Carefully dig out the trench. **DO NOT** dig the trenches too large or too deep; the ground around the edges of each trench must remain **firm** and undisturbed. **(Image 23)**

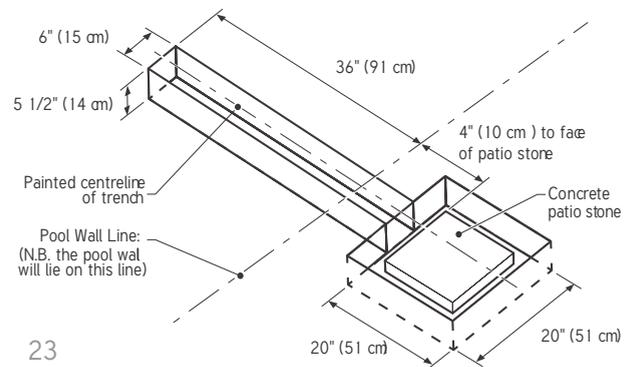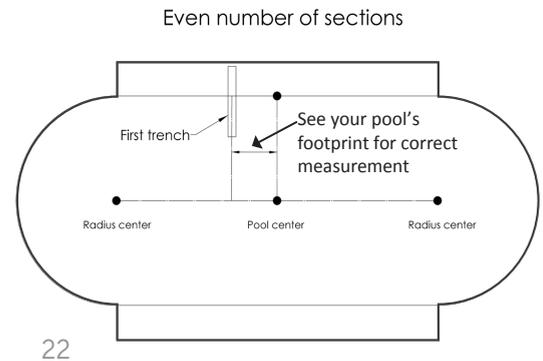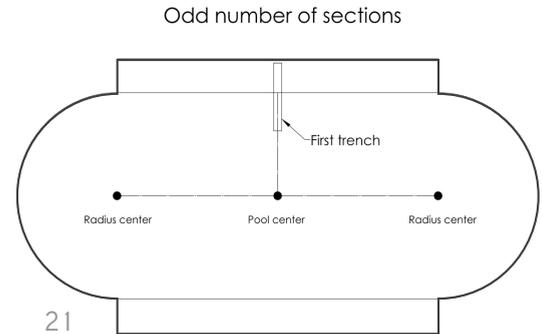

IMPORTANT NOTE:

This first buttress that you install will be the reference to install the remaining buttresses, therefore ensure that measurements and placements are exactly where they need to be. **VERIFY YOUR POOL'S FOOTPRINT!**

02 GROUND PREPARATION

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS


d) The bottom plates for the straight section must be at the same level with the crushed stone. Spread a layer of crushed limestone (or equivalent) 3/4" (19 mm) thick into the bottom of each trench. Pack firmly. If you do not put crushed stone, understand that the bottom plates all around the pool must be at the same level. The warranty will void if you do not comply with this requirement.

e) Place a concrete patio stone 12" x 12" square x 2" thick (30 x 30 x 5 cm) into the wide part of each trench, on top of the limestone layer. **Make sure** it is **LEVEL** and positioned correctly. (Images 24 & 25)



IMPORTANT NOTE:

Crushed limestone or equivalent must be used instead of brick sand or vermiculite to backfill the base U-channels. The level of compaction achieved by using crushed limestone or equivalent is superior to that of brick sand or vermiculite.

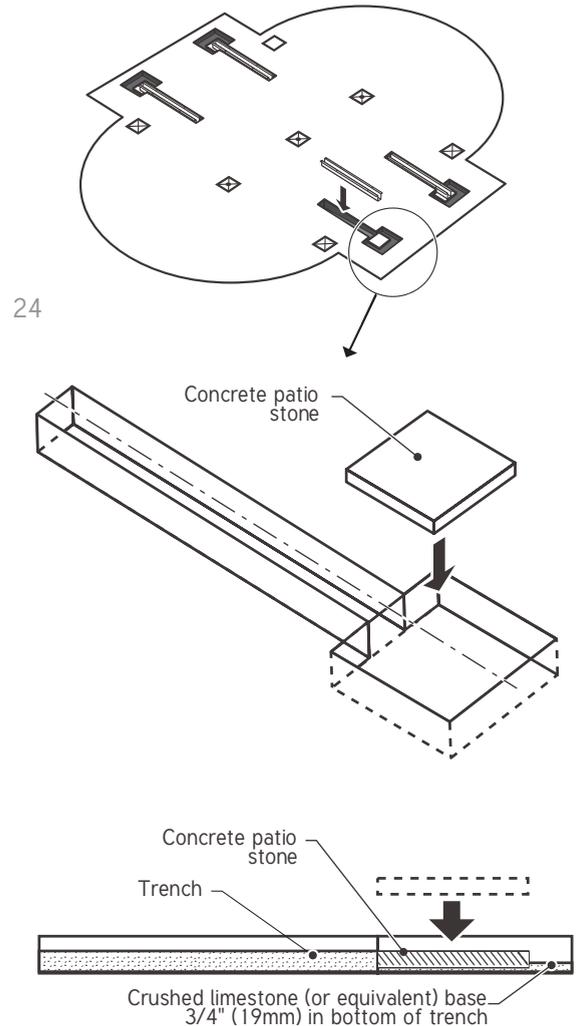


6. Assemble Buttresses for Base Channels

a) Add another layer of crushed limestone (or equivalent) 1" (25mm) thick into the bottom of each trench, and around the patio stones. Pack firmly. **(Image 25)**


b) In each trench, measure 32" (81 cm) from the **Pool Wall Line** to the end of the channel. Carefully add more limestone (or equivalent) to the trench. **(Image 26)**

c) Repeat steps 5 (a) or (b), depending if you have odd or even number of trenches up to step 6 (b) for the rest of the base U-channels and trenches. Remember to please follow your pool's footprint at the end of this Section 1 for measurements on the placement of the trenches.

d) Use the carpenter's level to make sure everything is exactly level with the rest of the cleared area and the base plates (the base plates will be installed in Section 2). If it is not, the base U-channel must be removed and the crushed limestone (or equivalent) and patio stone adjusted.

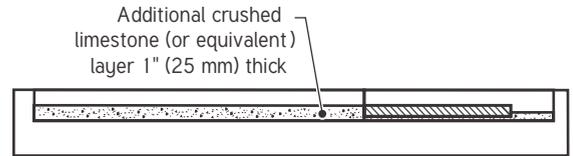

25

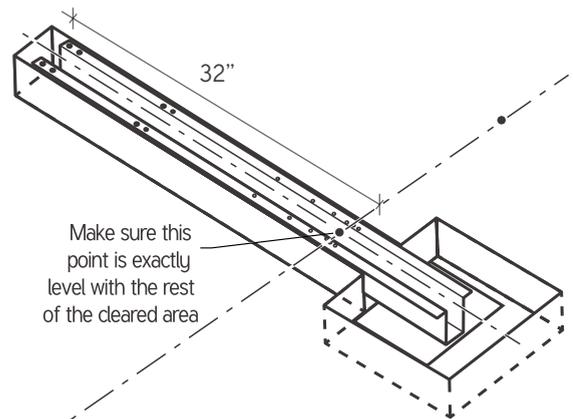

26



IMPORTANT NOTE:


This first buttress that you install will be the reference to install the remaining buttresses, therefore ensure that measurements and placements are exactly where they need to be. **VERIFY YOUR POOL'S FOOTPRINT!**



CAUTION:

Make sure there is adequate drainage in the bottom of each trench and along the sides of the pool area. There must be adequate drainage for a safe and secure pool foundation.

Overview of the Buttrass assembly


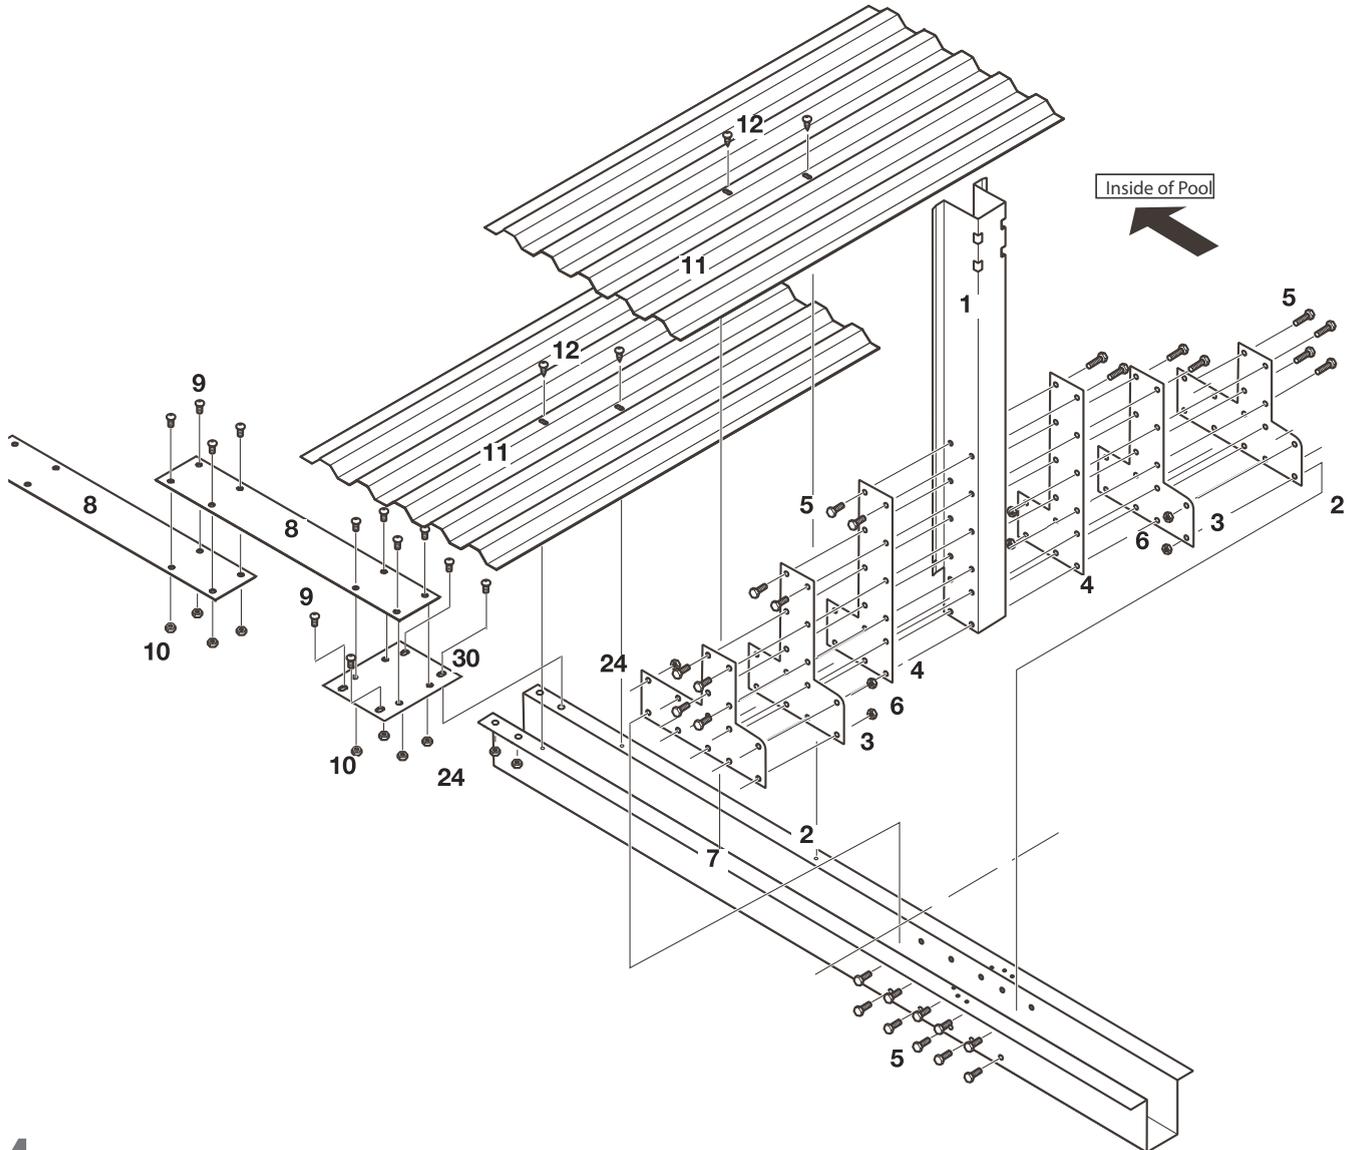


KEY PART NAME

- 7 Base U-Channel
- 1 Upright Channel
- 4 Inside 'L' Bracket
- 3 Middle 'T' Bracket
- 2 Outside 'T' Bracket
- 11 Hold Down Plate (Pressure plate)
- 8 Strap
- 30 Strap Bracket

- **Hardware bag, 1 per set of buttresses; includes;**
- 9 1/4" –20NCx3/4" hex bolt
- 10 1/4" –20NCx3/4" serrated flange hex nut
- 5 3/8"–16NCx1" hex bolt
- 6 3/8"–16NC serrated flange hex nut
- 12 No. 12x5/8" self-tapping screw
- 24 Nut/Hex/1/4"–20/18–8SS

Hardware for gibraltar pools
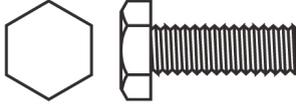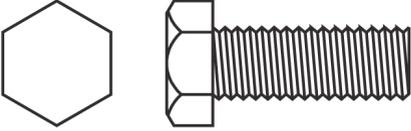
| DESCRIPTION | ACTUAL SIZE | TOOL REQUIRED FOR INSTALLATION |
|---|---|---|
| SELF TAPPING SCREW #12 x 5/8 INCH LONG |  | PHILLIPS NUMBER 3 SCREWDRIVER OR RED HANDLE #2 ROBERTSON SCREWDRIVER |
| SERRATED FLANGE HEXAGON NUT 1/4-20 |  | 7/16 INCH WRENCH OR SOCKET |
| HEXAGON HEAD BOLT 1/4-20 x 3/4 INCH LONG |  | 7/16 INCH WRENCH OR SOCKET |
| SERRATED FLANGE HEXAGON NUT 3/8-16 |  | 9/16 INCH WRENCH OR SOCKET |
| HEXAGON HEAD BOLT 3/8-16 x 1 INCH LONG |  | 9/16 INCH WRENCH OR SOCKET |


D. ASSEMBLING THE BUTTRESS

1. Assembling the Buttresses (Straight Section)

a) Assemble one upright channel (key 1) with two T-plates (key 2 and 3) and one L-plate (key 4) (one each of sizes short, medium and tall) on one side using eight bolts (key 5) and nuts (key 6). The bolt heads should be on the outside of the T- and L-plates and the nuts on the inside of the upright channel. Do not tighten the bolts yet. Be sure to follow the drawing carefully to have the T- and L-plates and upright channel facing the right direction (the T-plates each have a radiused corner; this radiused corner must FACE AWAY from the open side of the upright channel). **(Image 27)**

b) Repeat step (a) for the other side of the upright channel with three more T- and L-plates.

c) Insert the upright channel and T- and L-plate assembly into a base U-channel (key 7). The open side of the upright channel will face toward the inside of the pool. Line up the holes and fasten with twenty bolts (key 5) and nuts (key 6). Do not tighten the bolts yet. **(Image 28)**

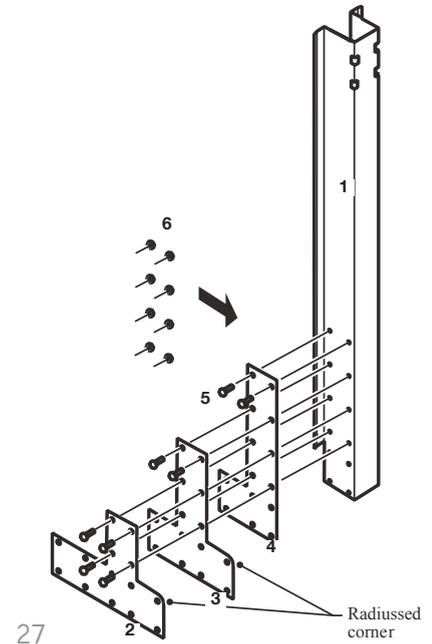


IMPORTANT NOTE:
Lift the base U-channel out of the trench first to fasten it to the vertical U-channel and T-plates.

IMPORTANT NOTE:
Failure to properly install and tighten all of the bolts and nuts may void the warranty on your pool.


d) First, tighten the eight bolts and nuts on each side of the upright channel. Second, tighten the four bolts and nuts on each side of the base U-channel. Lastly, tighten all the rest of the bolts and nuts (see image 27 and 28).

Important: for a proper fit, you must push the T- and L-plates against the upright channel while tightening the bolts and nuts **(image 28)**.


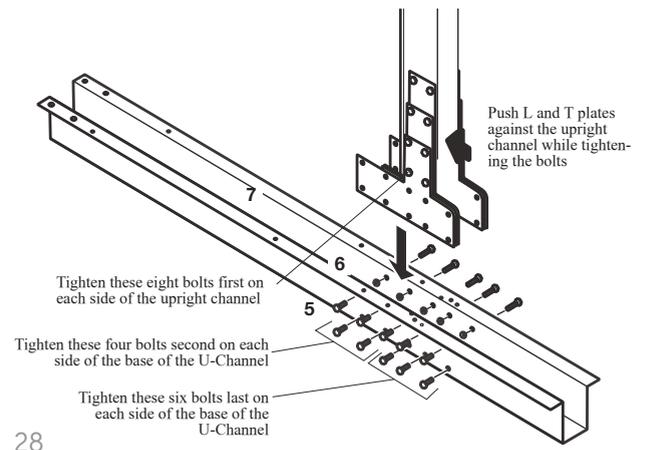


2. Insert the buttress (Straight Section)


- a) Insert the bottom plate by sliding it on each upright channel. (Image 30)
- b) Insert the buttress rails between the buttresses, the bottom rails insert into the bottom plate. Make sure the groove faces up. (Image 29)
- c) Insert the transition rails. Slide one end of each rail into the bottom plate in the upright channel and slide the other end together with a bottom plate. (Image 31)

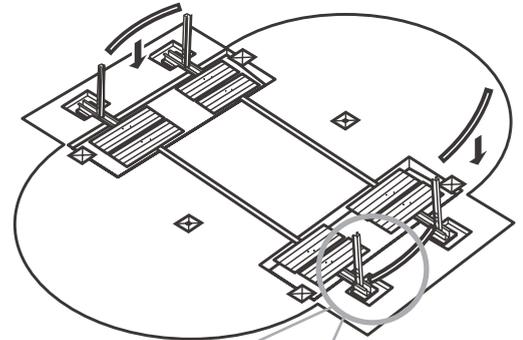

29

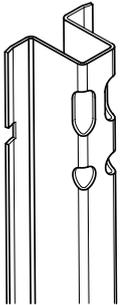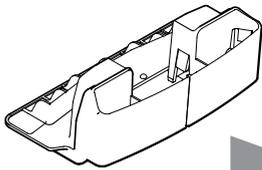

30

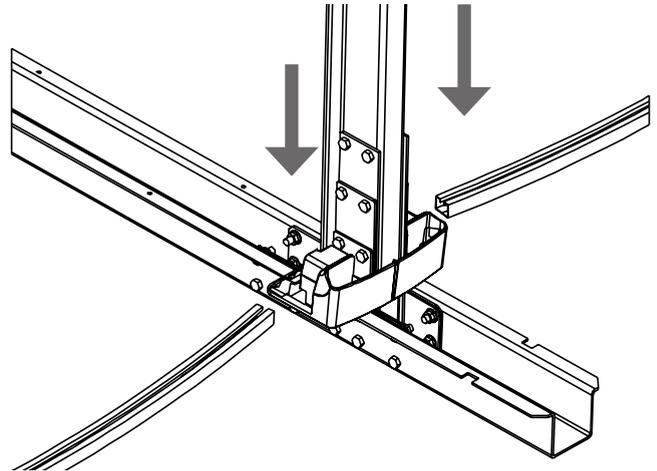

31



IMPORTANT NOTE :


When measuring the distance to the face of each base plate, use a piece of string longer than required and place a mark on the string at the required distance.

3. Fill the Base U-Channels (Straight Section)

a) Fill the base U-channels and the trenches they sit in with crushed limestone (or equivalent). Fill them up to the top edges of the base U-channels. If the limestone is dry spray it with some water to help with the compaction. Stand on the base U-channel and tamp down the limestone until a solid base is achieved (by standing on the base U-channel your weight helps prevent the base U-channel from moving). Add additional limestone as required. **(Image 32)**

b) Make sure the space under the end of the base U-channel is completely filled with crushed limestone. **(Image 33)**

c) Recheck the distances between the base U-channels and make any adjustments you need to make sure the spacing is exactly right.

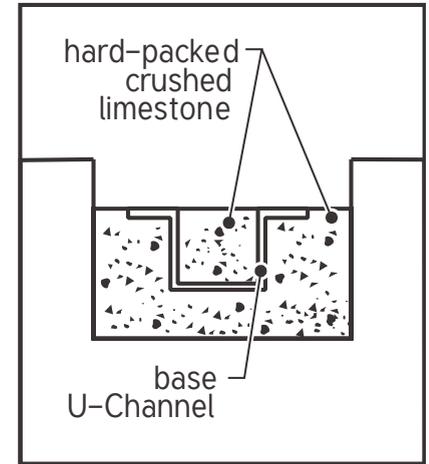


32



IMPORTANT NOTE:

Crushed limestone or equivalent must be used instead of brick sand or vermiculite to backfill the base U-channels. The level of compaction achieved by using crushed limestone or equivalent is superior to that of brick sand or vermiculite.

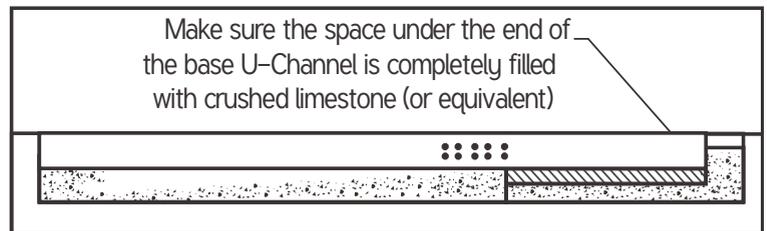


33


4. Install Straps, Strap Brackets and Hold Down Plates (Straight Section)

- a) Gently flatten any kinks or bends out of the straps.
- b) Dig out the area between and to the sides of the base U-channels, down to a level exactly even with the tops of each base U-channel and 22" (55 cm) beyond the sides of each base U-channel. **(Image 34)**
- c) Dig a shallow trench, 3" (8 cm) wide and approximately 1-1/2" (4 cm) deep for each strap (make the trench as deep as the top of the base U-channel), aligned with the centreline of the trench, from one side of the pool to the other.
- d) Using a straight edge (you can use one of the hold down plates), drag along the top edge of the base channel to ensure the ground is level to the base U-channel. If it is not level, spread some crushed limestone on the ground. Stand on the base U-channel and tamp it down hard with a tamping tool. Verify the ground is level to the base U-channel by running the straight edge along the top edge of the base U-channel again. Repeat this step until the ground is level. **(Image 35)**

(no step e)

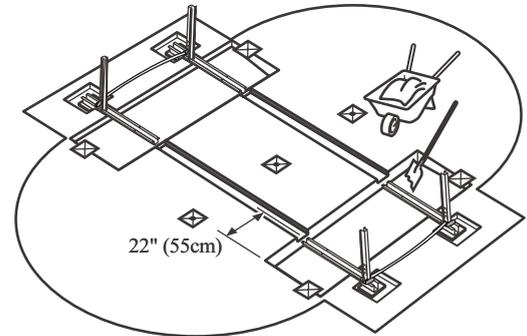

34

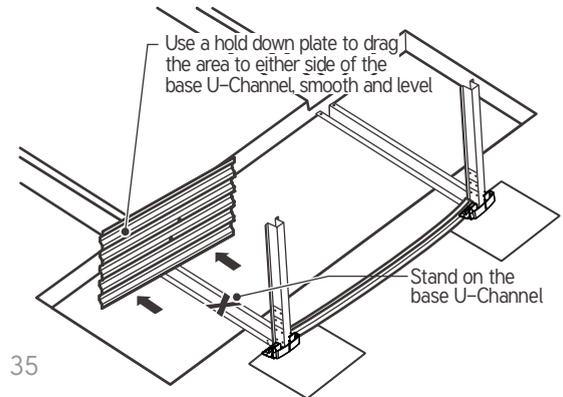

35



IMPORTANT NOTE :

Brick sand or vermiculite cannot be used on any part of the buttress installation process. These materials have poor compaction properties that can cause problems with the buttresses after the pool has been filled with water

f) Join one end of a strap (key 8) to a strap bracket (key 30). The strap should be on top of the strap bracket. Line up the holes (be sure to use the holes shown in Image 10) and fasten together with four hex head bolts (key 9) and four nuts (key 10). The bolt heads must be on the top and the nuts underneath. Tighten the bolts. **(Images 36 & 37)**




g) Line up the holes in the strap bracket and fasten together with four hex head bolts (key 9) Tighten the bolts snugly but do not overtighten. **(Images 37 & 38)**

h) Repeat steps (d to g) for the corresponding strap and strap bracket on the opposite side of the pool.



IMPORTANT NOTE:

Failure to properly compact this material may result in the crushed limestone being compacted instead by the weight of the water after the pool is filled, resulting in indentations in the bottom of the pool.

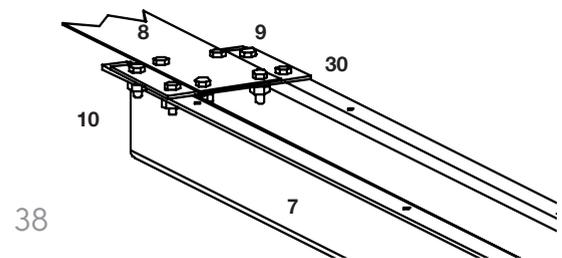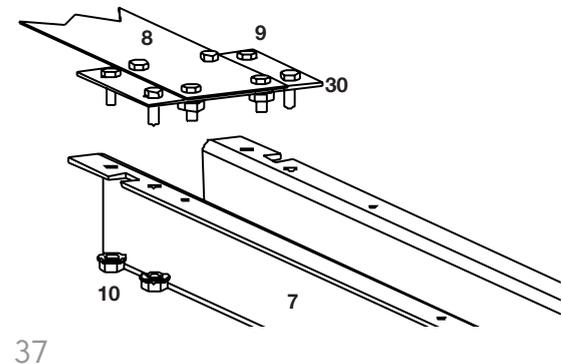
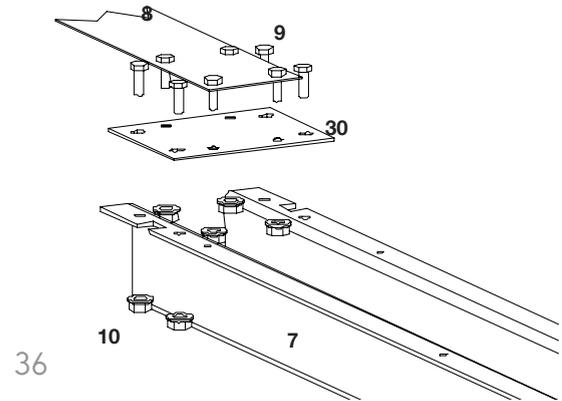


02 GROUND PREPARATION

SECTION

GENERAL INSTRUCTIONS – OVAL POOLS

i) Spread 3/4" (19 mm) of crushed limestone (or equivalent) over the dug out area for the hold down plate closest to the centre of the pool. Do not spread any material over the top of the base U-channel. Place the hold down plate as shown in **Image 39** on top of the crushed limestone.

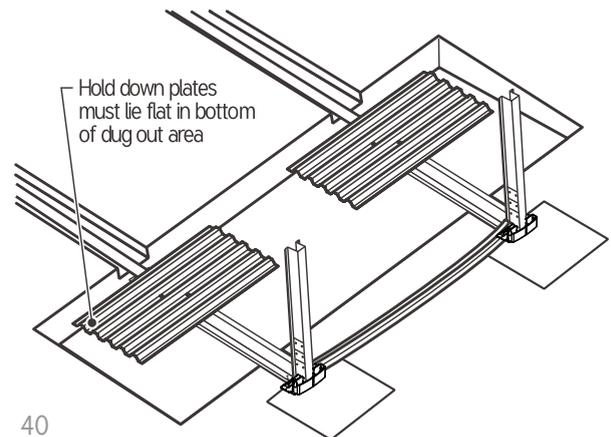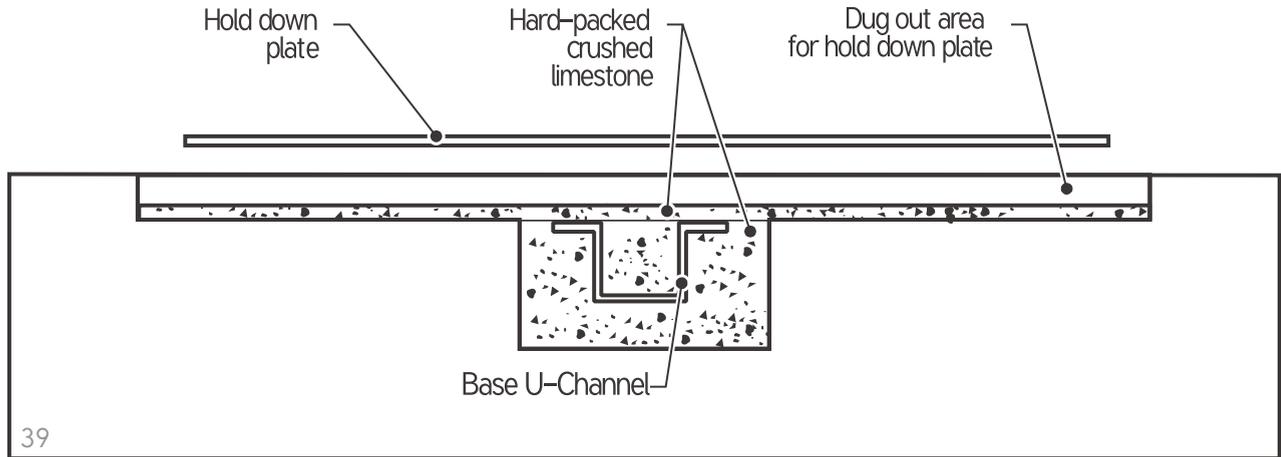


IMPORTANT NOTE :

Make sure each entire hold down plate lies completely flat in the area dug out explained in previous step 3 (d). The hold down plate must lie flat or it may lift and damage the pool liner after the pool is filled with water. (Image 34)


02 GROUND PREPARATION

SECTION


GENERAL INSTRUCTIONS – OVAL POOLS

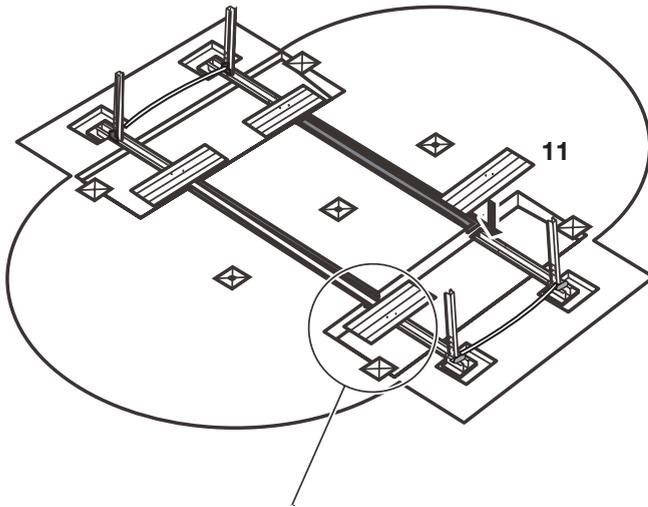

j) Begin shifting the hold down plate in a forwards and backwards motion (**see Image 41**), while simultaneously applying a downward force on the hold down plate until the plate rests on top of the base U-channel. Check to see that the outside ends of the hold down plate have filled with material, and insert material into any open areas until they are full. This will prevent any low spots from forming around the hold down plates when the pool is filled with water.

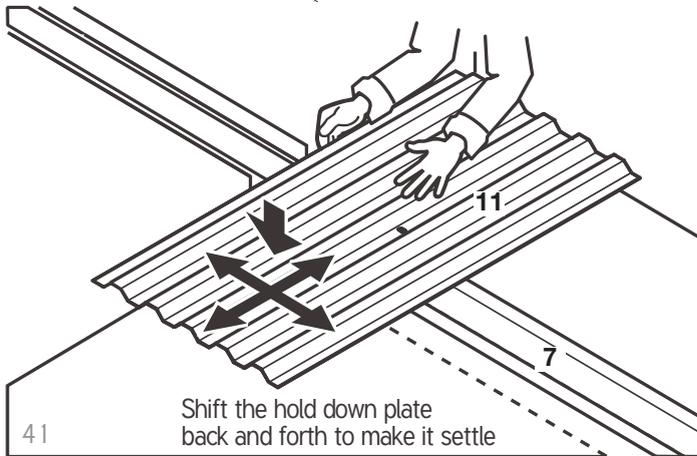

Shift the hold down plate back and forth to make it settle

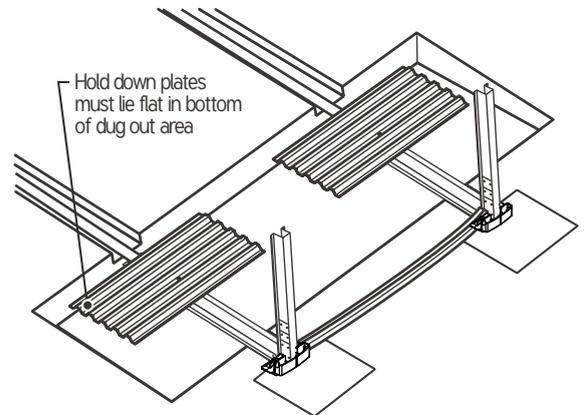

ONCE AGAIN – IMPORTANT NOTE :

Make sure each entire hold down plate lies completely flat in the area dug out explained in previous step 3 (d). The hold down plate must lie flat or it may lift and damage the pool liner after the pool is filled with water. (**Image 42**)

02 GROUND PREPARATION

SECTION





k) Line up the holes in the hold down plate (be sure to use the holes shown in **Image 43**) with the holes in the base U-Channel (key 7) and fasten with two self-tapping screws.

l) The hold down plates are installed on the base U-channels in pairs. Repeat steps (i) and (j) for the second hold down plate (key 11) on the base U-channel (key 7). Set the second plate so the flange overlaps the first hold down plate. Line up the holes in the hold down plate and base channel (**see Image 44 & 45**) and fasten with two self tapping screws (key 12). Tighten all of the screws. (**Image 46**)

m) Repeat steps (i) to l) on the opposite side of the pool.

IMPORTANT NOTE :

 When lining up the holes in the base U-channel and the first hold down plate, ensure the bolt heads in the strap bracket are in the first two grooves of the hold down plate.

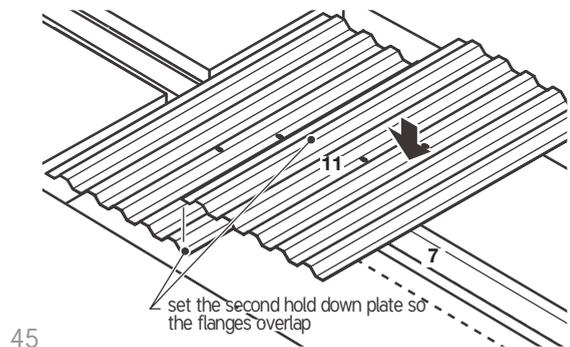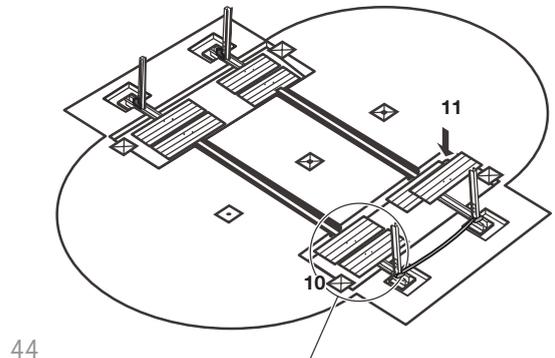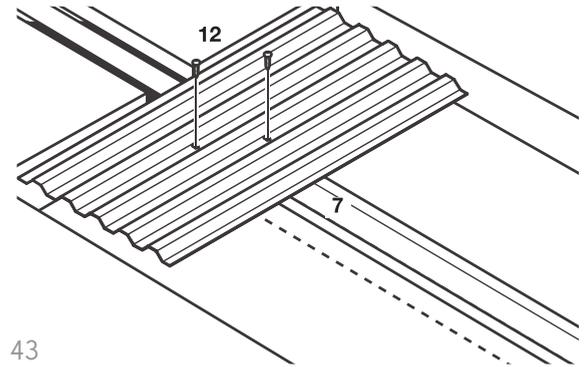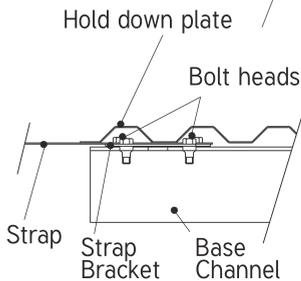


n) Join the two straps already installed with any additional straps (key 8) together to make full-length straps, joining the two sides of the pool. Line up the holes and fasten together with four bolts (key 9) and four serrated nuts (key 10). The bolt heads must be on the top and the nuts underneath. Tighten the bolts. **(Image 47)**


o) Repeat steps (b) through (m) for the rest of the buttresses and hold down plates. Tighten all of the bolts and screws.

p) Once all the trenches are dug and buttresses with patio stones are installed. Remeasure each buttress to ensure that they are all straight and that the buttress is perpendicular.

q) *Now add crushed stone around the buttress (do not cover) and be careful not to move the buttress. Take measurements at every upright and then check measurement again.

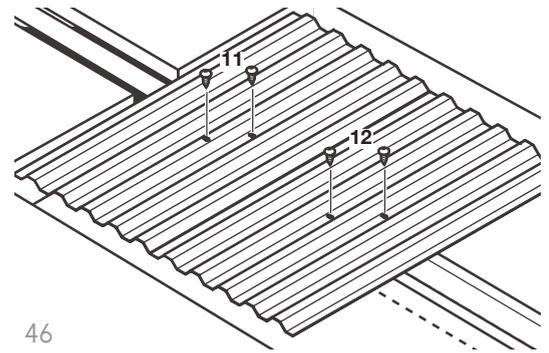

46

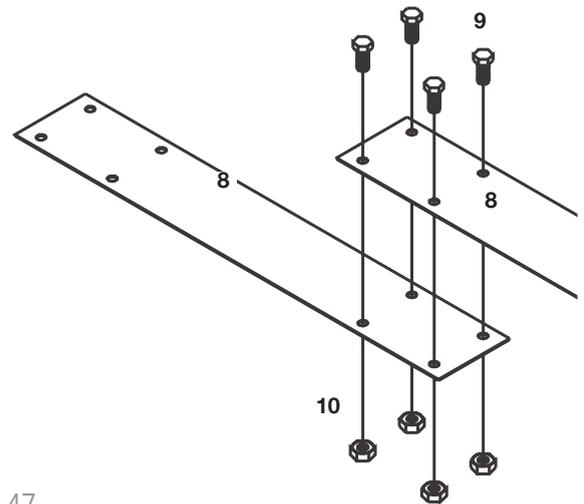


47

1. Install the curved bottom rails (Round Section)

a) Each pool uses three different types of curved bottom rails. **(Image 48)**

Please refer to your pool footprint **(at the end of this document)** in order to recognize where each type of bottom rail should be placed.

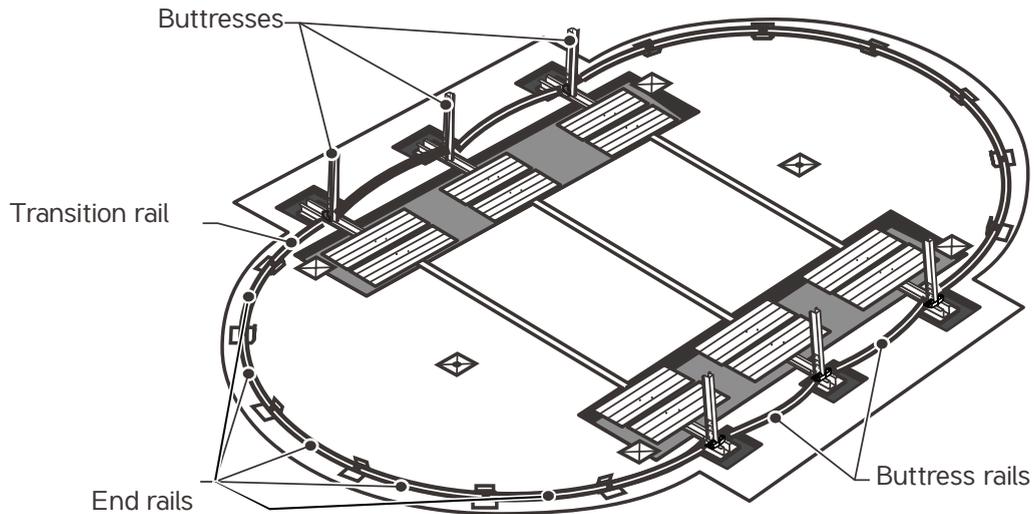

48



IMPORTANT NOTE :

Be sure to refer to your pool footprint (at the end of Section 1), in order to recognize where each bottom rail should be placed.


03 ASSEMBLING THE POOL BASE

SECTION


d) Slide the other end of the transition rail together with a base plate (key 14). **(Image 49)**

e) Lay out the end rails and base plates on both rounds ends of the pool area. Refer to your pool's footprint **(end of document)** to ensure correct dimension. (Note: this step will not work on the buttress rails or transition rails.)

f) Insert the end rails. **(Image 50)** Leave a gap (please see your pool's footprint for gap measurement) between the ends of the rails.

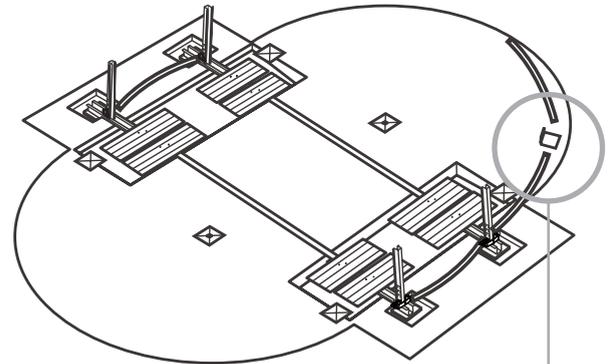

49


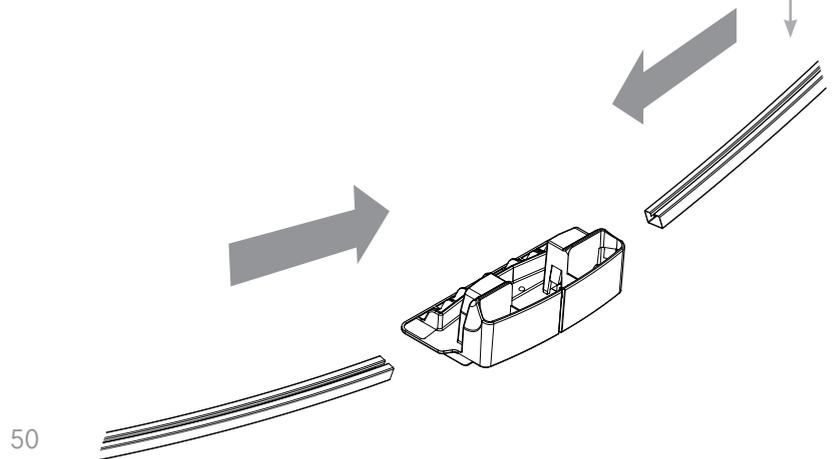


50

2. Patio Stones (Optional)–(Round Section)

- a) Concrete patio stones may be placed at the base of each upright of your pool. **(Image 51)**
- b) Each bottom plate will show the location for a patio stone. Make a mark in the ground at each base plate.
- c) Remove the bottom rails and bottom plates and lay out the patio stones around the circle where the bottom plates were.
- d) The patio stones must be sunk into the ground so the tops are flush with the soil around them. Use the carpenter's level to make sure the patio stones are perfectly level and flush with the ground. Use either the carpenter's level and a 2-by-4 (5cm x 10cm) wood plank, or the optical level between patio stones to make sure the stones are level with each other. **(Image 52)**
- e) Do not install blocks or rails on loose sifted soil or sand. There must be no space between the ground and the bottom of the rails. All patio blocks must be flush with the ground, solid and level with each other in all directions.

NOTE: Installing patio blocks is optional and the blocks may shift due to temperature changes.

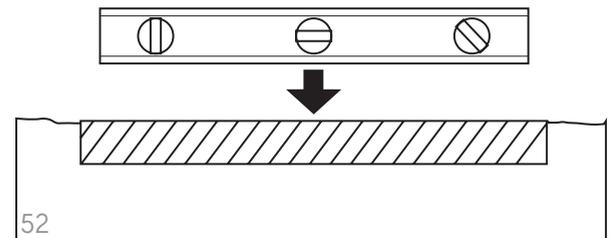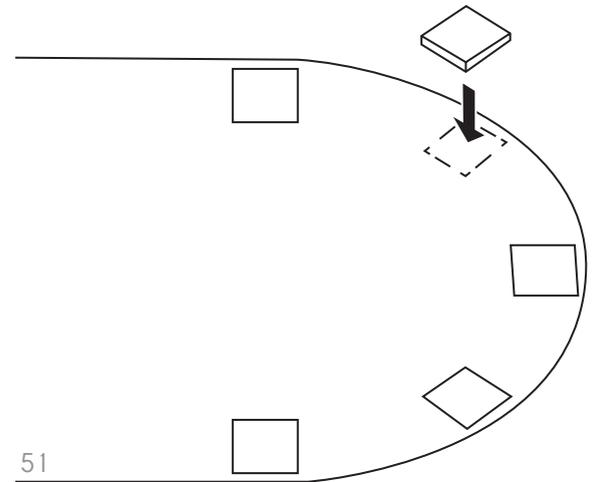


IMPORTANT NOTE :

Make sure the patio stones are perfectly level and flush with the ground. All patio blocks must be flush with the ground, solid and level with each other in all directions.

3. Spread out Brick Sand

- a) Make sure any screw or bolt heads that are to be covered with sand or styrofoam are covered with duct tape first.
- b) Fill in all of the trenches completely with crushed limestone.
- c) Spread a layer of fine brick sand (no pebbles) over the foundation area, 2" (5 cm) deep. Use a rake to make the brick sand flat and smooth. Instead of brick sand, you can use 1" or 1-1/2" (25 or 38 mm) thick sheets of styrofoam. Cut the sheets to fit. Remove the Styrofoam until the wall is installed. Reinstall the styrofoam sheets and join them with duct tape along the whole length of each seam. Remember to wait until the pool wall has been installed before installing the Styrofoam. **(Image 53)**

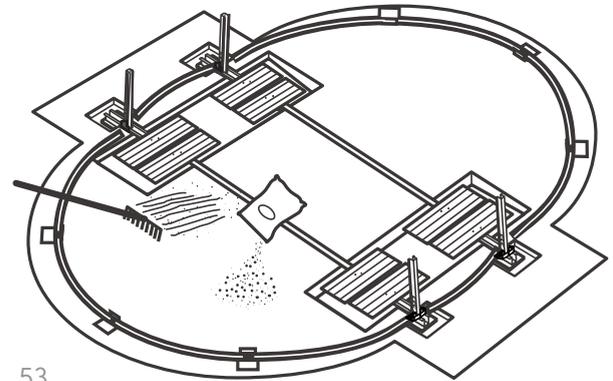


IMPORTANT NOTE :

Spread brick sand or sheets of styrofoam out over the entire pool foundation area inside the base rails. This provides a protective surface for the pool liner to rest on.

04 ASSEMBLING THE POOL WALL


SECTION

GENERAL INSTRUCTIONS – OVAL POOLS

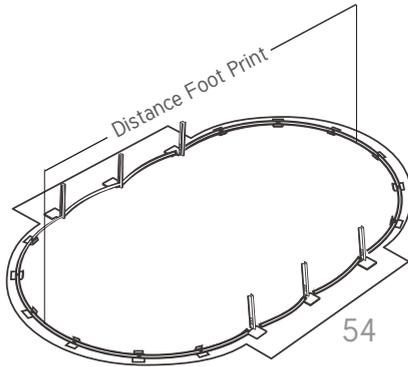

Refer to the Pool Foot Prints document (**end of this document**).


4. Putting up the wall

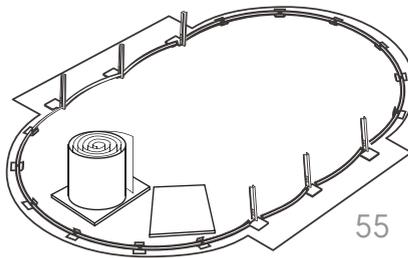

Bring the following items into the middle of the pool foundation before you start uncoiling the pool wall: plywood, some extra sand or fine dirt to make the cove, the liner and a ladder to climb out after the wall is assembled.

Make sure the skimmer and water return holes are located where you need them to be. The skimmer and water return holes are positioned towards the end of the wall.

Unpackage the coiled pool wall and stand it on the plywood at the place close to where you need to install skimmers. (**image 55**)

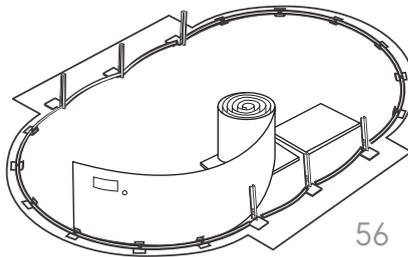

Start uncoiling the wall, guiding the bottom edge into the curved bottom rail. The starting end of the wall must be positioned in the centre of a bottom plate and the skimmer and return holes should be positioned where the pump and filter will be. (**image 56**)

Set lengths of stabilizer onto the top ledge of the wall as you uncoil it.



IMPORTANT NOTE:

If you use a skimmer, you should consider putting the pre-punched slots not too far from the planned location of the filter. If you don't use a skimmer, the pre-punched holes must be covered with heavy fabric tape. It prevents the lining from being cut.

04 ASSEMBLING THE POOL WALL

SECTION




IMPORTANT NOTE:

It is preferable to use very fine sand that is easily compacted. Be careful not to spill sand on the bottom rails.

We also suggest installing vinyl-covered hooks and rope to hold the wall steady (**image 57**). Ideally the help of several people should be solicited to hold the wall in place. Work around the foundation until the entire pool wall is uncoiled into the bottom rails.

When uncoiling the wall, the skimmer and return holes are positioned toward the end of the wall.

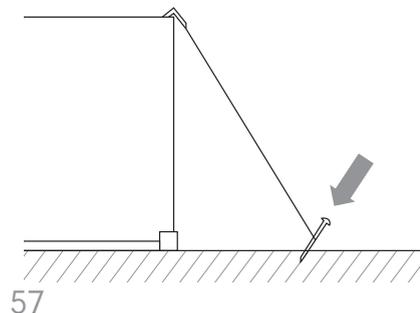

Adjusting the wall circumference



Now that you have installed the wall you can be faced with three scenarios:

- + The wall joints align perfectly, if so move on to the next step 6.
- + Your wall appears to be too short. IT IS NOT. However the space between the bottom rails must be decreased by lightly tapping the bottom plates towards the inside of the pool. You can also tap the wall lightly with both hands in the desired direction. (**image 58**)


You must recheck the gaps at each and every one of the bottom rails so that they are equal in gap size.

- + Your wall appears to be too long. IT IS NOT. However the space between the bottom rails must be increased by lightly tapping the bottom plates towards the outside of the pool. You can also tap the wall lightly with both hands in the desired direction. (**image 59**)

You **MUST** recheck the gaps at each and every one of the bottom rails so that they are equal in gap size.

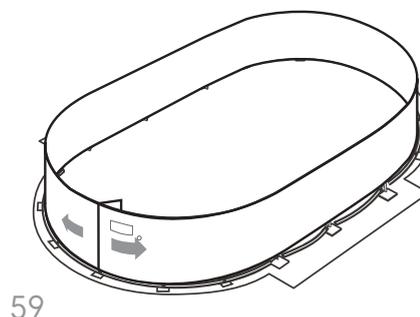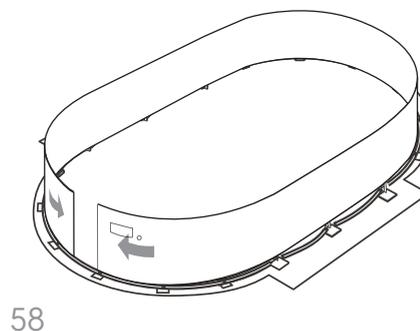

5. Fasten and seal the wall

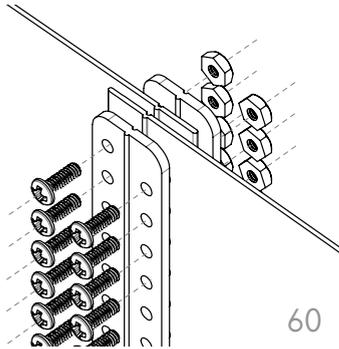


When tightening the screws start from either the top and go down or vice versa. Do not start a few screws from top and a few from the bottom to meet in the middle, this can cause problems later on. **(image 60)**



IMPORTANT NOTE:

Stick a screwdriver through two of the holes to help line up the ends of the walls.

Cover the seam and bolt heads on the inside/interior of the pool wall completely with 2' (50 cm) duct tape. **(image 61)**

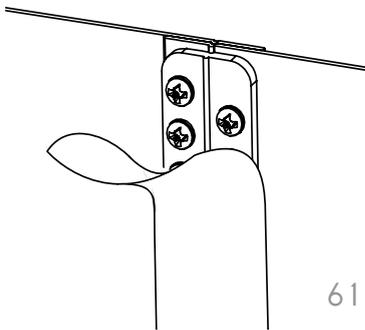

Using a tape measure, measure across the circle at each bottom plate. The pool wall must be round. Adjust the circle by nudging the base plates in or out with your foot.



IMPORTANT NOTE:

Due to the enormous pressure exerted against the steel wall, it is absolutely essential to screw ALL THE BOLT TIGHTLY. DO NOT LEAVE ANY EMPTY HOLES. Bolt heads must be inside and washers outside. Remove all particles of steel from the bolts inside the pool.

6. Making the cove


You can now spread approximately 2" (5cm) of screened earth or mason's sand all around the inside of the pool wall. Build a cove of 3" (7,5cm) high, and not less, of well packed screened earth or mason's sand. **(image 62)**

Water the sand to compact it and use a trowel to spread it evenly.

DO NOT USE THIN SAND. GRASSTURF OR ANY OTHER MATERIAL SO CALLED "POOL BASE" THAT CAN CAUSE DAMAGES TO YOUR POOL. THE LINER COULD EVENTUALLY RUPTURE.

The cove is very important. THE MANUFACTURER WILL NOT BE RESPONSIBLE FOR DAMAGES CAUSED BY OMISSION OF THIS STEP.

If you are using Styrofoam cove pieces instead of sand, insert them in the bottom rail and refer to the installation instructions that are provided with them.

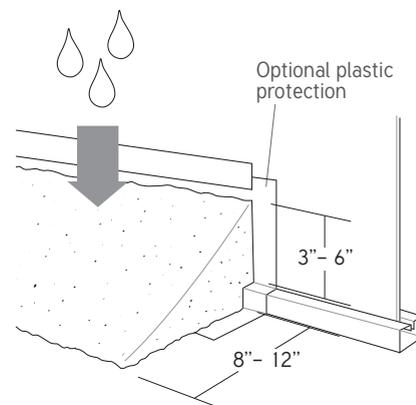

62



IMPORTANT INFORMATION ABOUT YOUR LINER

We do not make or supply liners for our pools.

Please contact your liner's manufacturer with questions or if instructions are not included with the liner.

Liner must be installed per the liner manufacturer's instructions.


Incorrect liner installation may void the warranty.



05 ASSEMBLING THE POOL FRAME

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

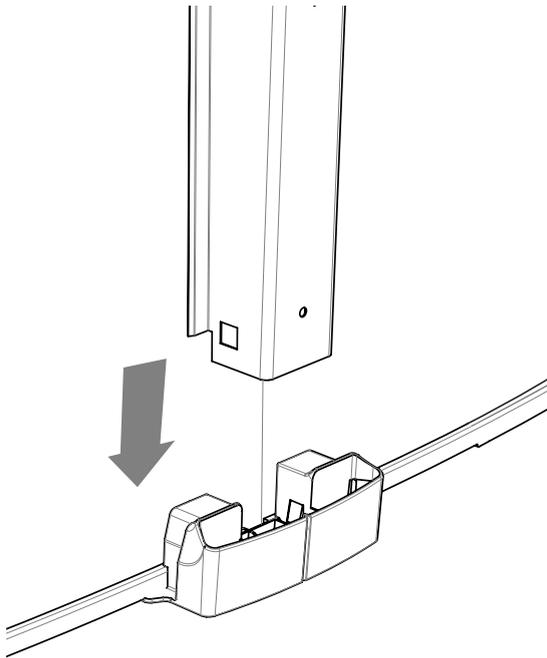

63

1. Install the uprights (Round section)

The wall joints is hidden behind the upright on most pools. This assures that the skimmer and the skimmer return holes are not obstructed.

Insert the upright in the bottom joining plate until the hooks snaps. **(image 63)**



IMPORTANT NOTE:

Use the ridges in the pool wall to make sure the upright column is straight up and down.



IMPORTANT NOTE:

Ensure to leave a gap between the two bottom rails



05 ASSEMBLING THE POOL FRAME

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

2. Install the uprights (Straight section)

The wall joints is hidden behind the upright on most pools. This assures that the skimmer and the skimmer return holes are not obstructed.

Insert the upright in the bottom joining plate until the hooks snaps. **(image 64)**




IMPORTANT NOTE:

Use the ridges in the pool wall to make sure the upright column is straight up and down.



IMPORTANT NOTE:

Ensure to leave a gap between the two bottom rails

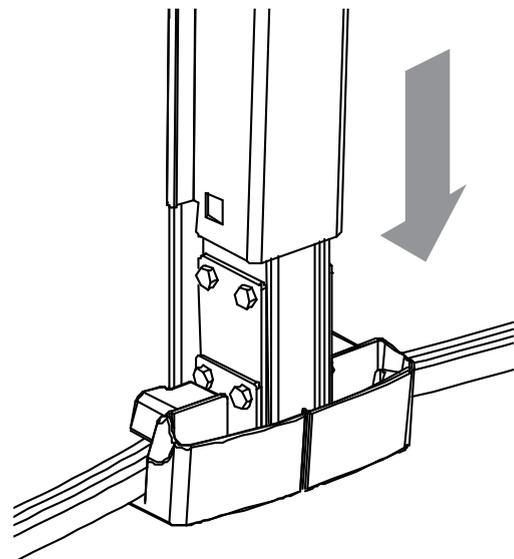

64

3. Install the stabilizers and top plates


Insert each end of the stabilizers into the other along the length of the wall. Make sure every stabilizers fits on the pool wall. **(image 65)**

Align the top plate on the upright and insert it in. The top plate slides into the top of the upright by applying pressure thus securing the wall and the upright together. Secure it with four screws: two on the sides and two on top. **(image 66)**. Apply pressure on the rear part of the top plate while you insert the side screws.


IMPORTANT NOTE



If you have some LED lights, you should install them now. Refer to the LED instruction manual to install them properly

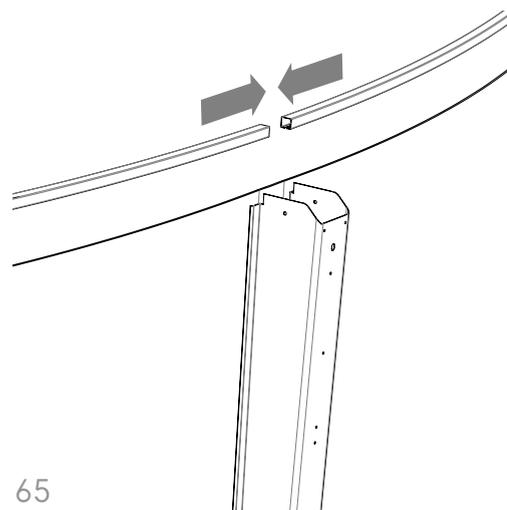

65

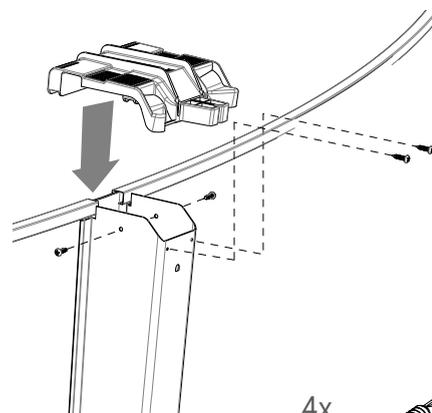

66

4x





05 ASSEMBLING THE POOL FRAME

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

4. Install top ledges

Position and place the top ledge on the two uprights. The top ledge must be pushed toward the inside part of the pool and the screw holes on the top ledge must align with the holes on the top of the upright. **(image 67)**


Insert partially the four Phillips screws at each end of the top ledge, 2 on the top and 2 on the side. Distribute evenly the space between the top plate.

Make sure to level the two axes of the uprights by pushing slightly inwards before tightening the screws permanently.



IMPORTANT NOTE

Ensure to leave a gap between the two stabilizers.

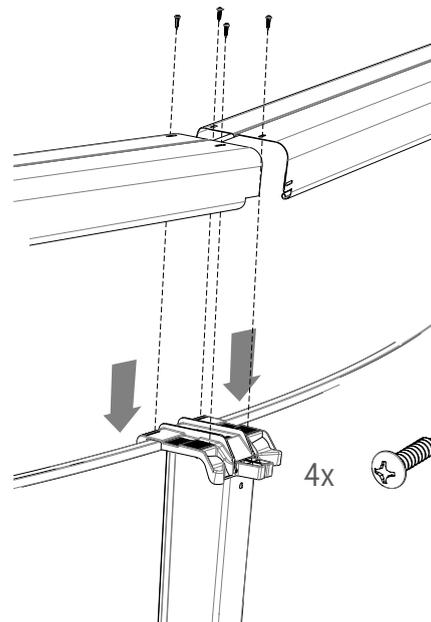

05 ASSEMBLING THE POOL FRAME

SECTION

5. Install the ledge covers and outer upright

Take the rear part of the ledge cover and insert the hooks underneath the top ledge. **(images 68)**


Toggle over the rear part of the ledge cover and align the screw hole with the one on the top plate. Attach with a Phillips screw. **(images 68-69)**

Insert the outer upright in the bottom joining plate until the hook snaps. **(image 69)**


Take the front part (outside of the pool) and slide it on the top ledges and ensure that the rear part ends are inserted in the front part. Attach with two Phillips inch screws. **(image 70)**

Secure the outer upright with a Tek screw at the top of it. **(image 70)**


Align the top part on the front part and insert the top part rear clips. The top part front clips snap onto the front of the front part by applying pressure. **(image 71)**

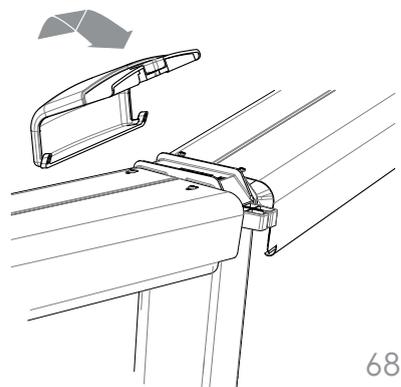

68

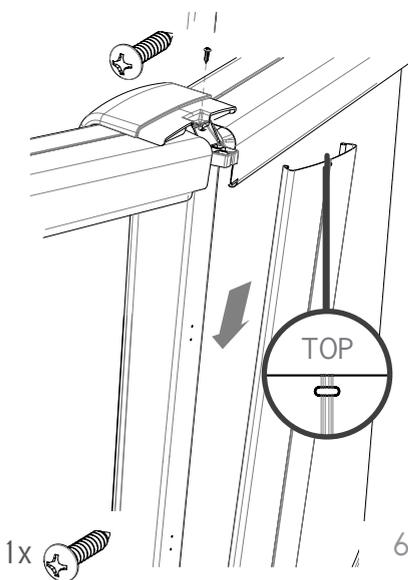


69

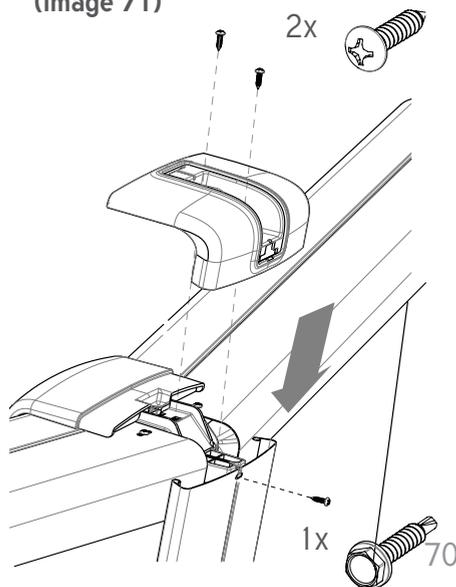

1x

70

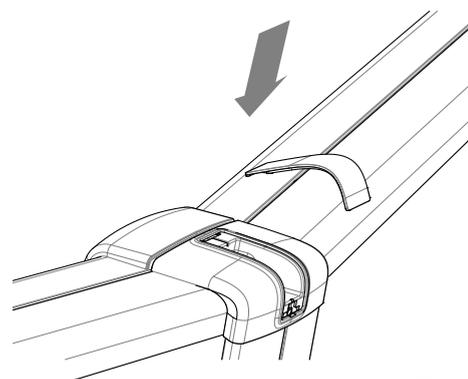

71

6. Finish filling the pool

Fill the pool with water to 2" (5cm) below the lowest opening. Make sure you remove any creases from the liner in the bottom of the pool before the water level gets too high.

Your pool is now installed. You must now install the filter and pump, the skimmer and water return inlet. Please follow the installation instructions that come with these products.




IMPORTANT NOTE

Before making any openings in the liner, fill the pool with 24" (60cm) of water to stretch the liner fully. When filling your pool, begin with a garden hose until there is about 12" (30cm) of water in the pool. This will allow the liner to stretch gradually. You can then use a heavier flow to finish filling it up.

7. Realign ledge covers

After filling the pool with water, check the alignment of the straight section. If it is not perfectly aligned please adjust manually and tighten screws when everything is straight. **(image 72)**

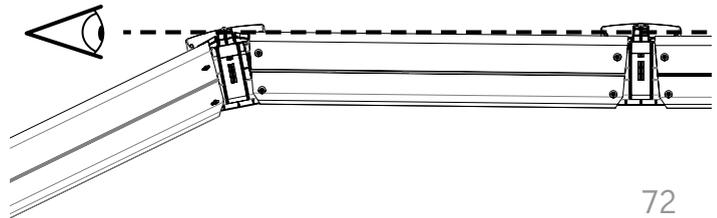

72




06 FOOTPRINTS

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

12 X 17

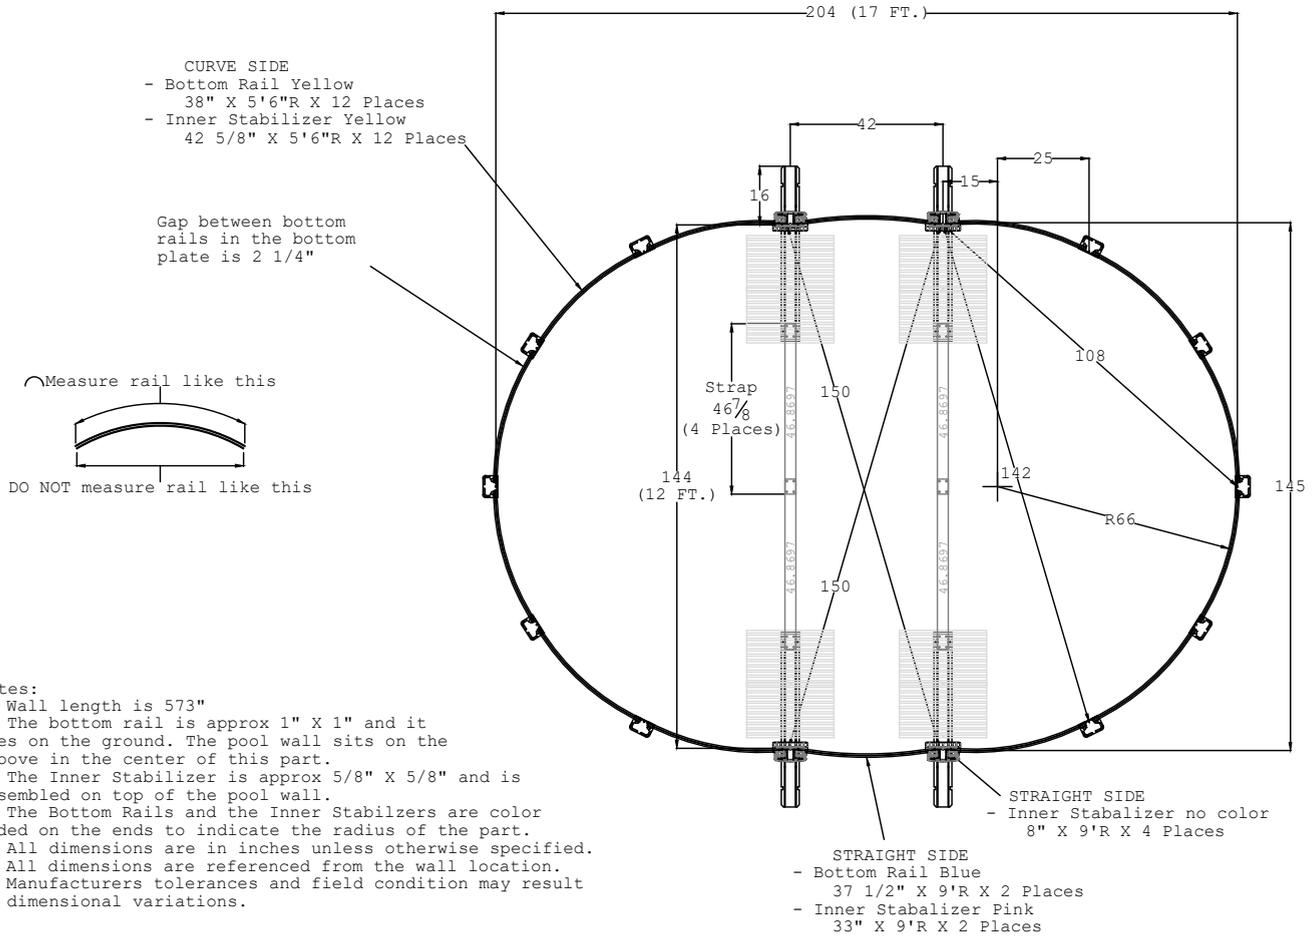




06 FOOTPRINTS

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

12 X 20

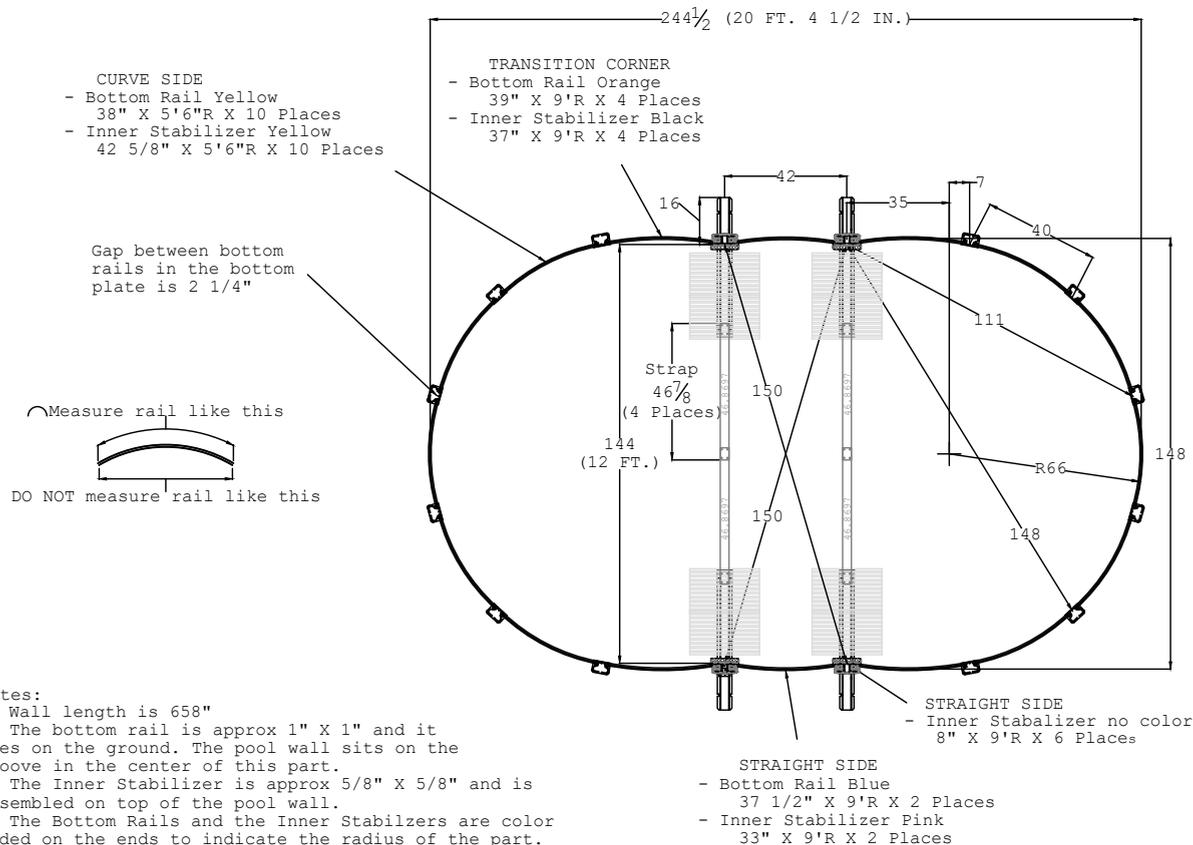

Notes:

1. Wall length is 658"
2. The bottom rail is approx 1" X 1" and it goes on the ground. The pool wall sits on the groove in the center of this part.
3. The Inner Stabilizer is approx 5/8" X 5/8" and is assembled on top of the pool wall.
4. The Bottom Rails and the Inner Stabilizers are color coded on the ends to indicate the radius of the part.
5. All dimensions are in inches unless otherwise specified.
6. All dimensions are referenced from the wall location.
7. Manufacturers tolerances and field condition may result in dimensional variations.




06

FOOTPRINTS

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

15 X 26

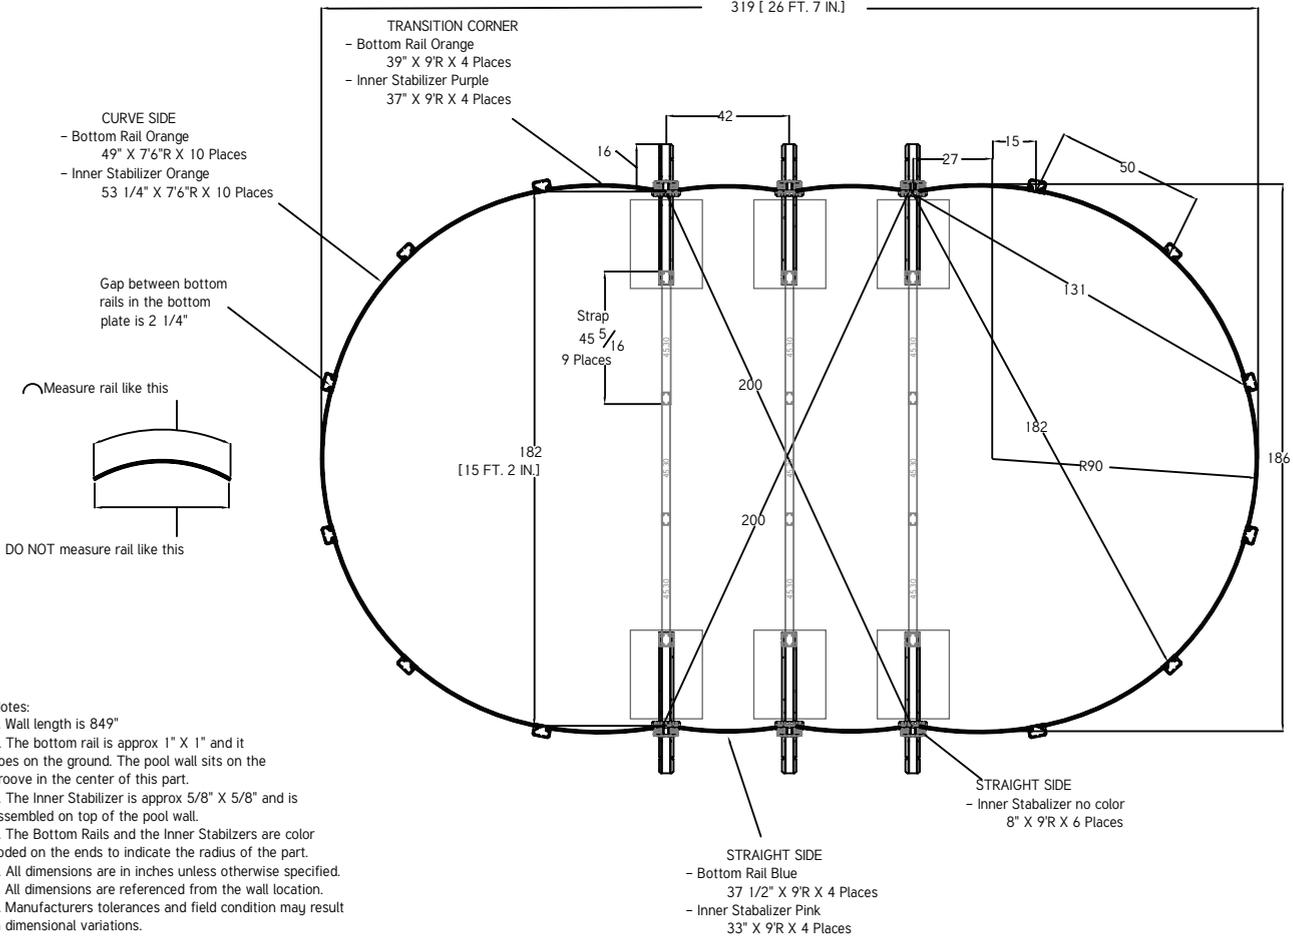




06 FOOTPRINTS

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

15 X 30

361 [30 FT. 1 IN.]

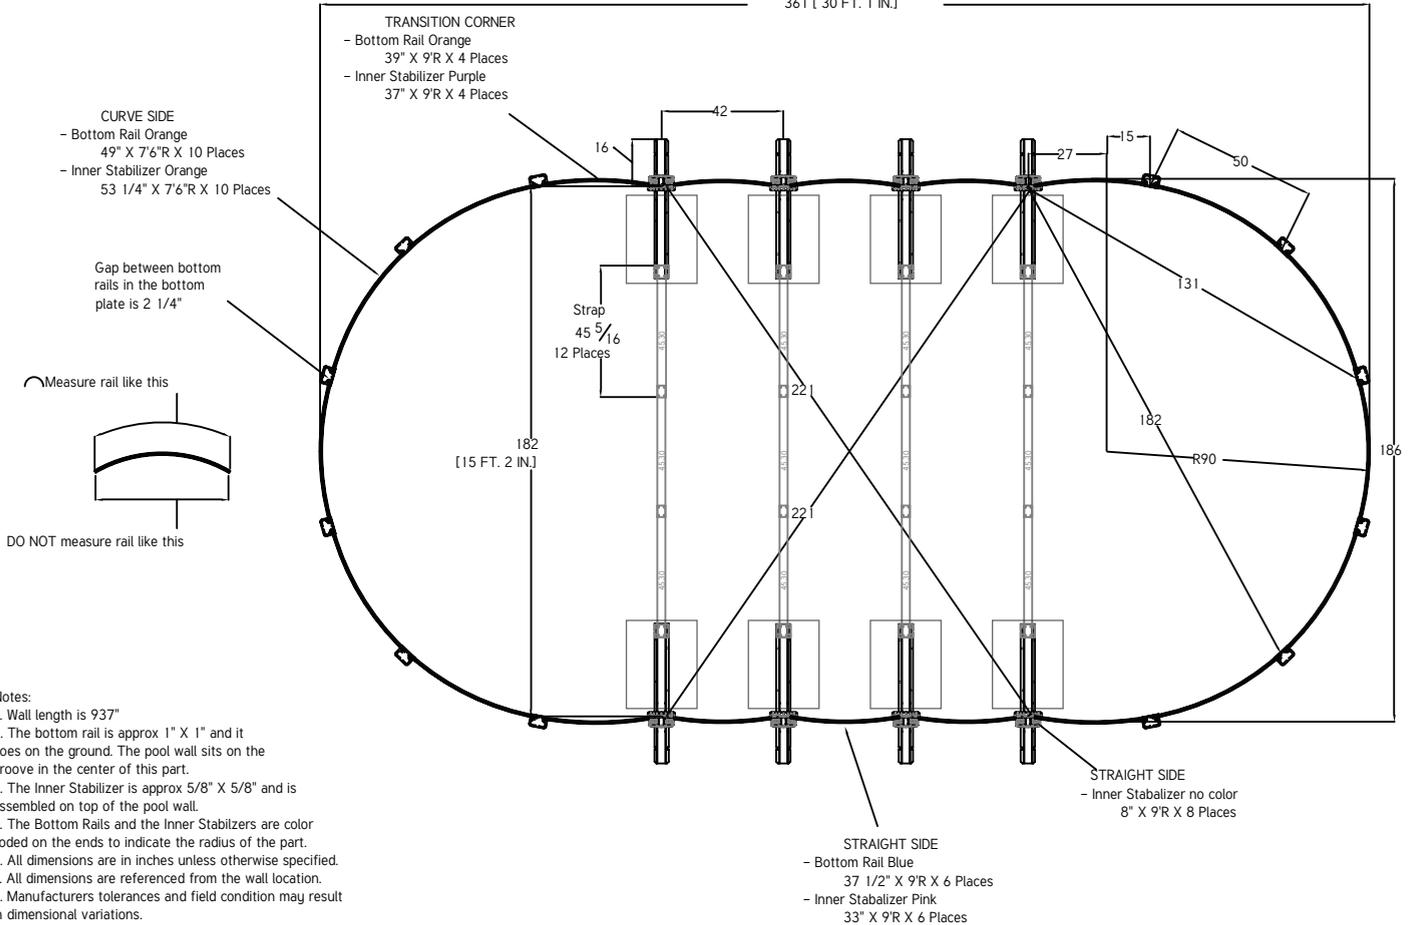

Notes:

1. Wall length is 937"
2. The bottom rail is approx. 1" X 1" and it goes on the ground. The pool wall sits on the groove in the center of this part.
3. The Inner Stabilizer is approx. 5/8" X 5/8" and is assembled on top of the pool wall.
4. The Bottom Rails and the Inner Stabilizers are color coded on the ends to indicate the radius of the part.
5. All dimensions are in inches unless otherwise specified.
6. All dimensions are referenced from the wall location.
7. Manufacturers tolerances and field condition may result in dimensional variations.



06 FOOTPRINTS

SECTION

GENERAL INSTRUCTIONS - OVAL POOLS

18 X 40

480 (40 FT.)

- CURVE SIDE**
- Bottom Rail Black
50" X 9"R X 12 Places
 - Inner Stabilizer Black
54 1/8" X 9"R X 12 Places

Gap between bottom rails in the bottom plate is 2 1/4"


Measure rail like this



DO NOT measure rail like this

TRANSITION CORNER

- Bottom Rail Orange
39" X 9"R X 4 Places
- Inner Stabilizer Purple
37" X 9"R X 4 Places

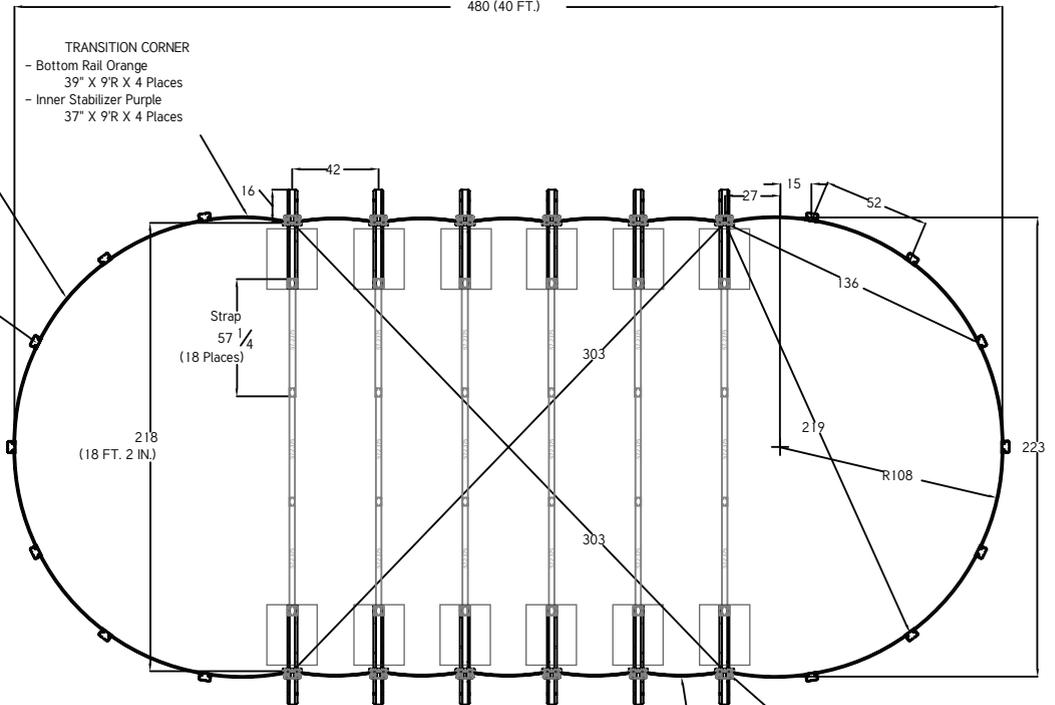

- STRAIGHT SIDE**
- Inner Stabilizer no color
8" X 9"R X 12 Places

- STRAIGHT SIDE**
- Bottom Rail Blue
37 1/2" X 9"R X 10 Places
 - Inner Stabilizer Pink
33" X 9"R X 10 Places

- Notes:
1. Wall length is 1220"
 2. The bottom rail is approx 1" X 1" and it goes on the ground. The pool wall sits on the groove in the center of this part.
 3. The Inner Stabilizer is approx 5/8" X 5/8" and is assembled on top of the pool wall.
 4. The Bottom Rails and the Inner Stabilizers are color coded on the ends to indicate the radius of the part.
 5. All dimensions are in inches unless otherwise specified.
 6. All dimensions are referenced from the wall location.
 7. Manufacturers tolerances and field condition may result in dimensional variations.

DAYTONA TRIBECA

designed by

ALTO